
Jet Noise Prediction using Hybrid RANS/LES with Structured Overset Grids

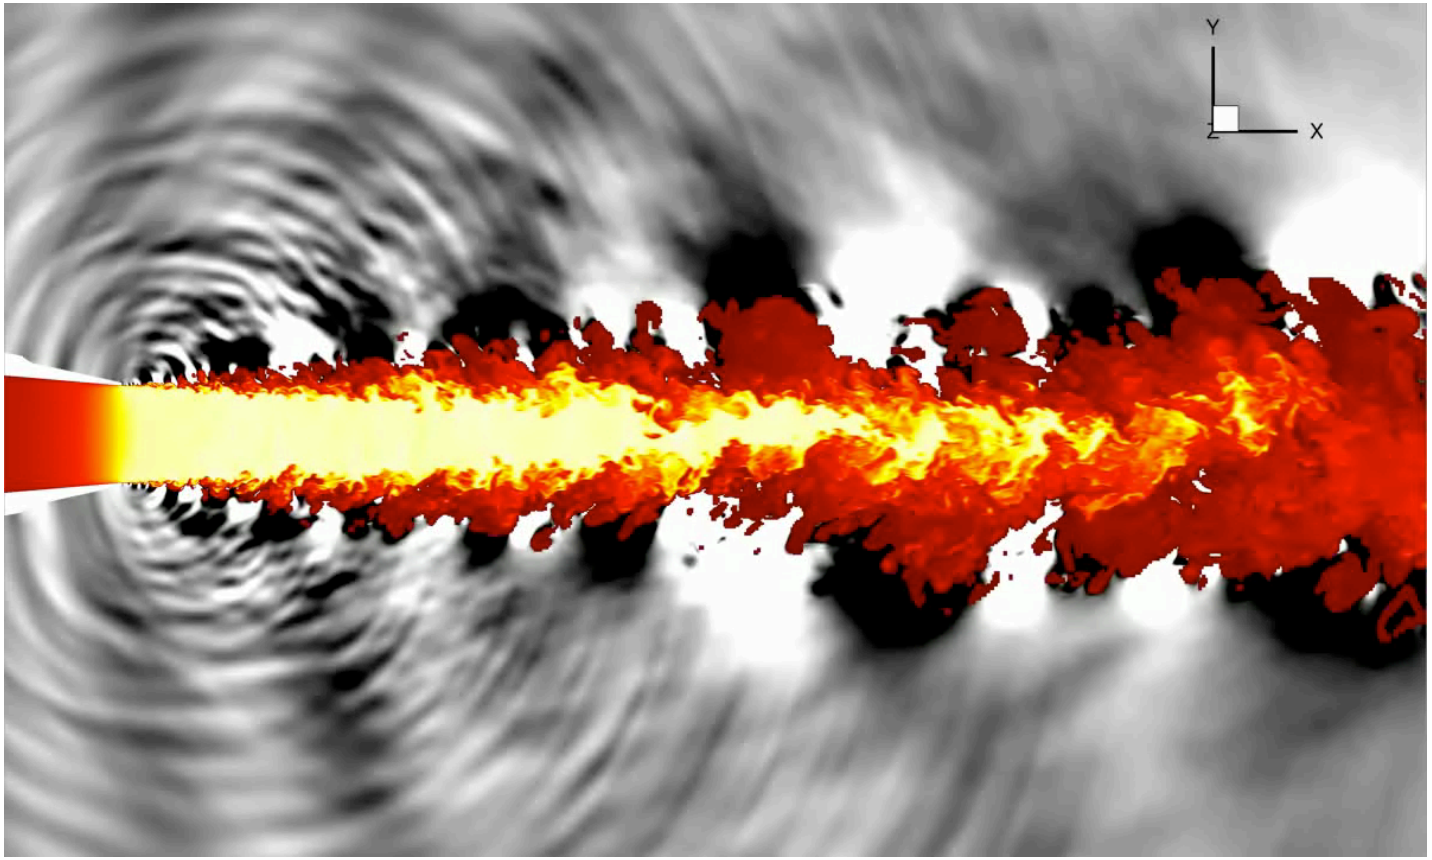

Jeffrey Housman
Computational Aerosciences Branch
NASA Ames Research Center
Co-Researchers: Gerrit-Daniel Stich, Cetin Kiris, and James Bridges

Advanced Modeling & Simulation Seminar Series
NASA Ames Research Center, September 28, 2017

AIAA-2017-3213: J. Housman, G. Stich, C. Kiris, J. Bridges

Outline




- Introduction
- Experimental Setup
- Computational Methodology
- Structured Overset Grid System
- Computational Results
  - Near-Field Comparison
  - Far-Field Comparison
- Summary
- Future Work

Introduction




- NASA has initiated research activities toward quiet supersonic flight.
- Reduction of sonic boom ground signature.
- Constraints during takeoff and landing at subsonic speeds must be satisfied.
- Use computational aeroacoustics (CAA) tools to assess new designs.
- First part of a systematic validation effort in jet noise prediction capability for NASA ARC Launch Ascend and Vehicle Aerodynamics Code (LAVA).


Introduction

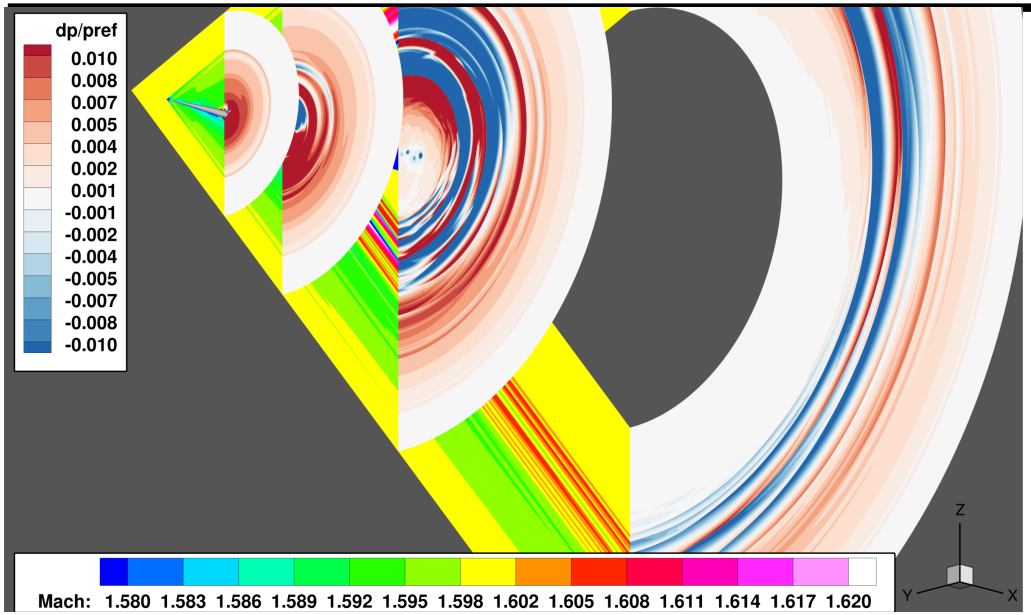


Housman, J. & Sozer, E. & Kiris, C. *LAVA Simulations for the AIAA Sonic Boom Prediction Workshop*. AIAA-2015-2262

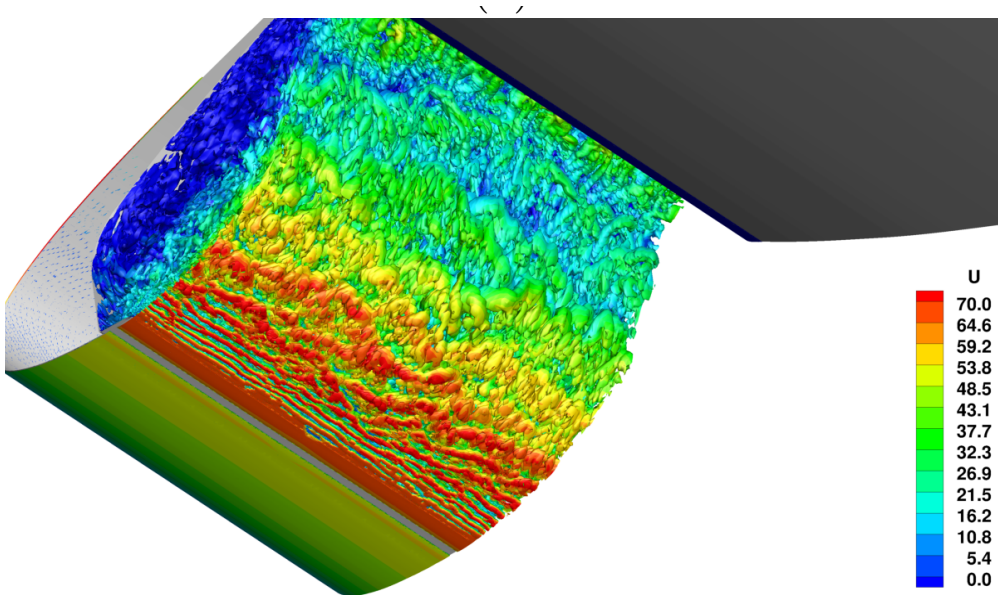

Housman, J. & Kiris, C. *Slat Noise Prediction using Higher-Order Finite-Difference Methods on Overset Grids*. AIAA/CEAS 2016

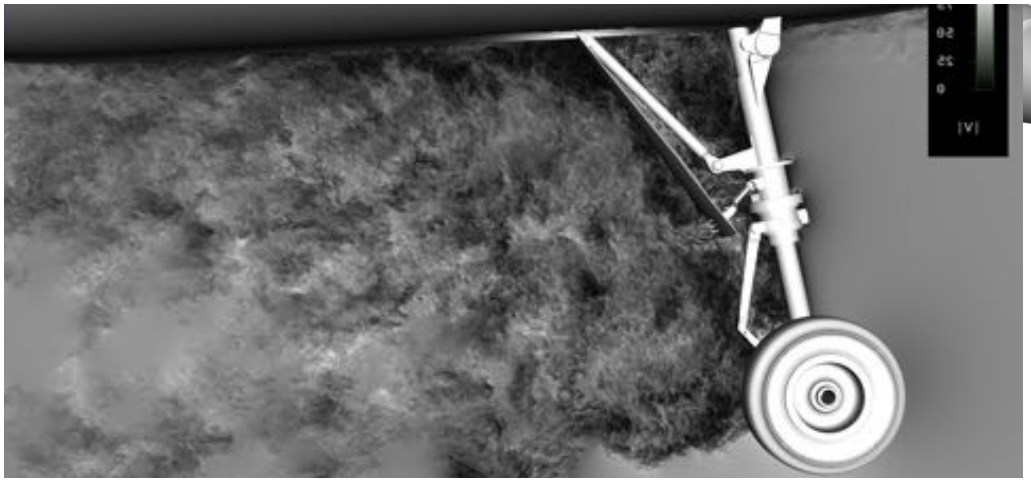

Barad, M. & Kocheemoolayil, J. & Kiris, C. Lattice Boltzmann and Navier-Stokes Cartesian CFD Approaches for Airframe Noise Predictions. AIAA-2017-4404

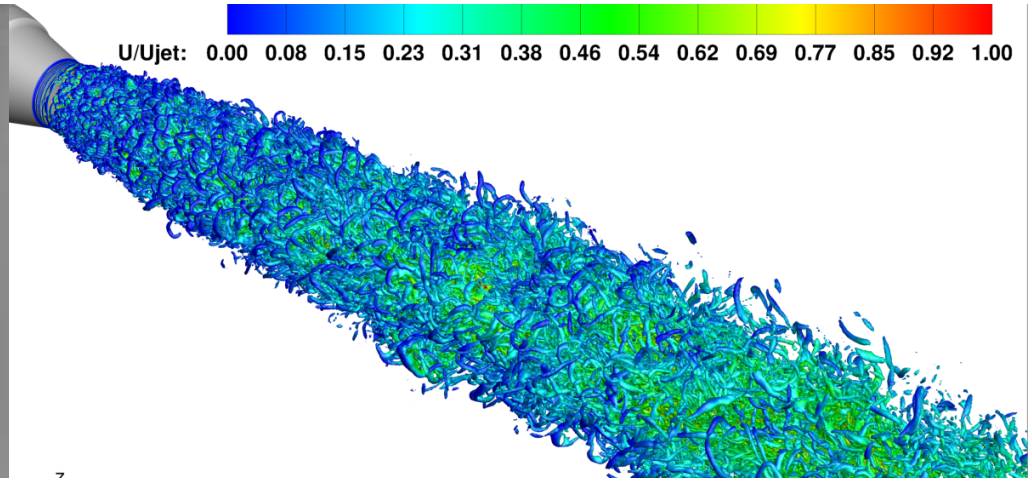

Housman, J. & Stich, G. & Kiris, C. & Bridges, J. *Jet Noise Prediction using Hybrid RANS/LES with Structured Overset Grids*. AIAA-2017-3213

Outline





- Introduction
- **Experimental Setup**
- Computational Methodology
- Structured Overset Grid System
- Computational Results
  - Near-Field Comparison
  - Far-Field Comparison
- Summary
- Future Work

Experimental Setup

- Small Hot Jet Acoustic Rig (SHJAR), which is located in the Aeroacoustics Propulsion Lab (AAPL) at NASA Glenn Research Center

Perspective view of SHJAR

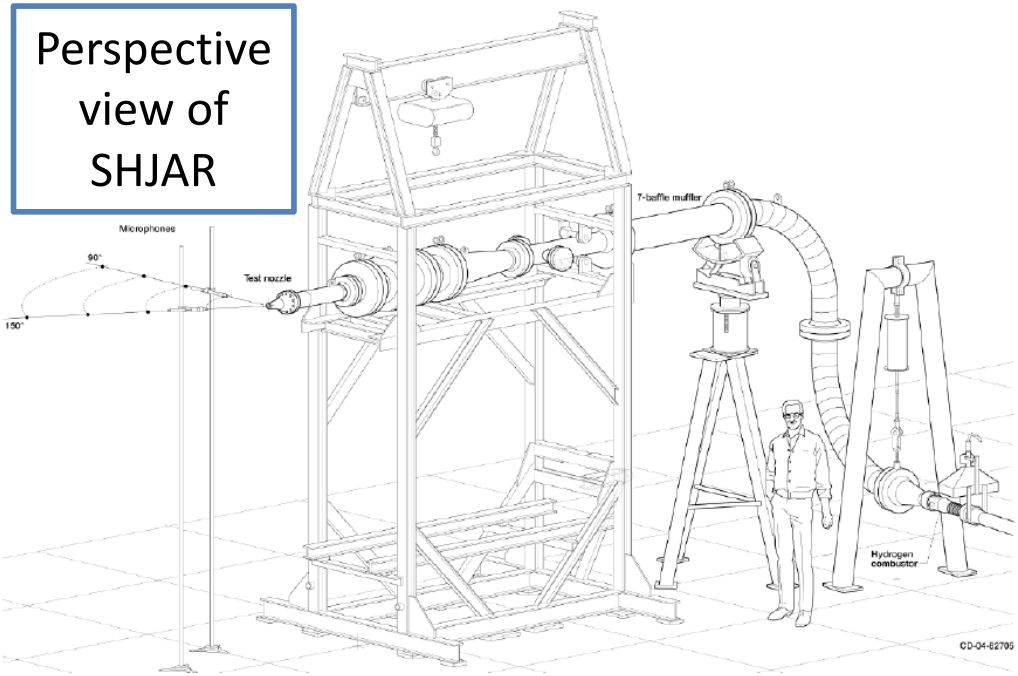

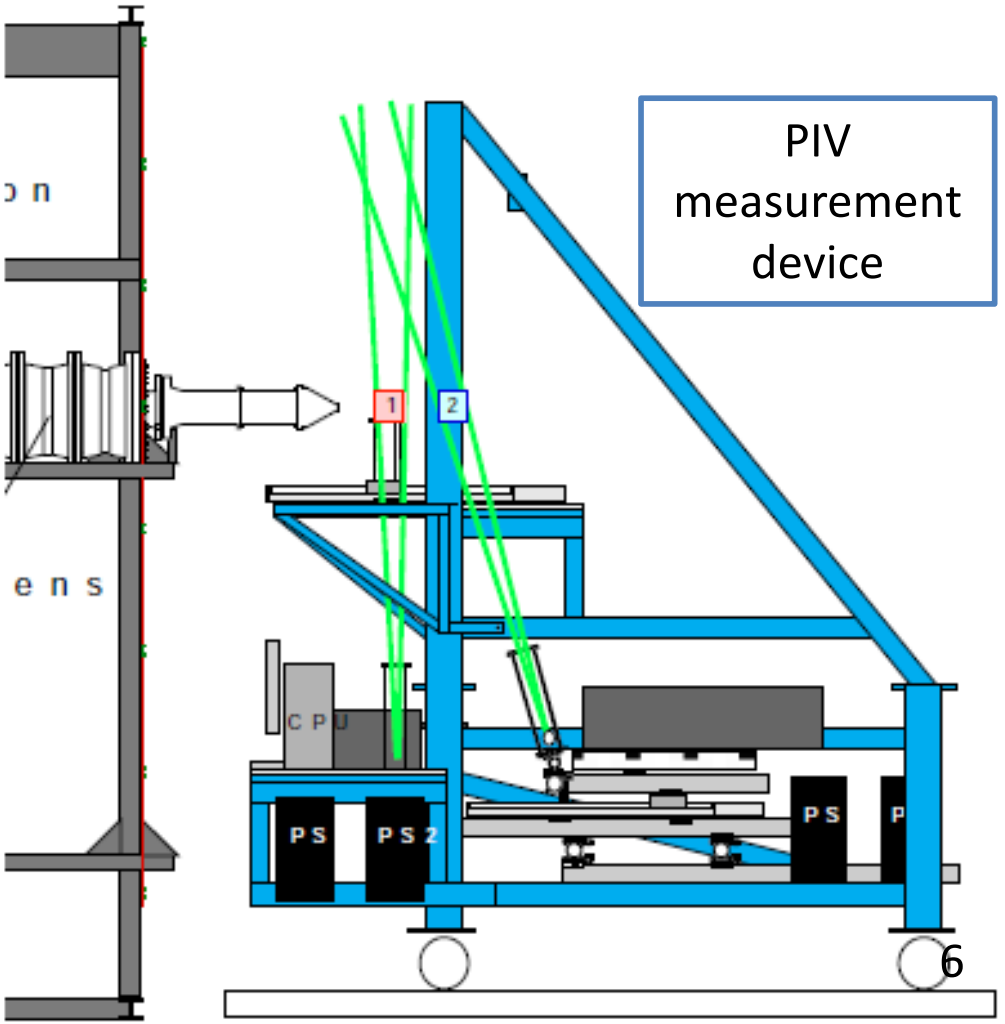



PIV measurement device

Bridges et. al. (NASA-TM-2011-216807)

Experimental Setup

- Baseline axisymmetric convergent Small Metal Chevron (SMC000) nozzle at Set Point 7 (SP7)
- Nozzle axis in downstream flow direction is marked as 180°

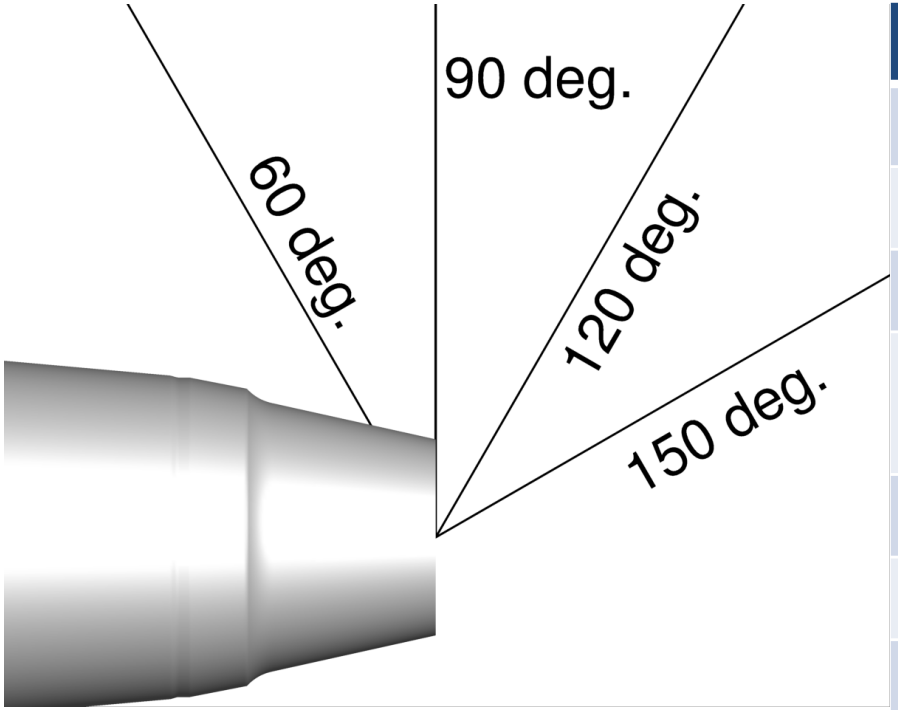

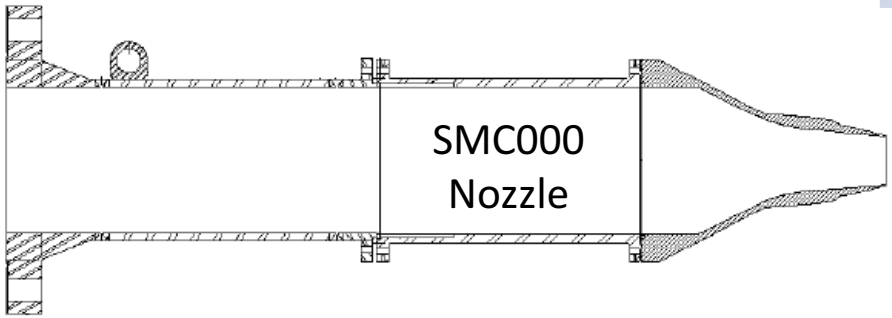

Bridges et. al. (NASA-TM-2011-216807)	SP7
Acoustic Mach number U_{jet}/c_∞	0.9
Jet temperature ratio T_e/T_∞	0.835
Nozzle pressure ratio p_t/p_∞	1.861
Nozzle Diameter D	0.0508 [m] 2.0 [inch]
Reynold number Re_D	1 Million
Reynolds number Re_τ	800
Boundary layer thickness	0.0128 D

Similar conditions were analyzed in Bres *et. al.* AIAA-2015-2535, but the boundary layer thickness is 5.5 times smaller in this study


Outline

- Introduction
- Experimental Setup
- **Computational Methodology**
- Structured Overset Grid System
- Computational Results
  - Near-Field Comparison
  - Far-Field Comparison
- Summary
- Future Work


Computational Methodology

LAVA Framework (Kiris et al. Aerospace Science and Technology, Volume 55, 2016)


- Computational Fluid Dynamics Solvers
  - Cartesian, Curvilinear, and Unstructured Grid Types
  - Overset Grid and Immersed Boundary Methods
  - Steady and Unsteady RANS (Reynolds-Averaged Navier-Stokes)
  - Hybrid RANS/LES (Large Eddy Simulation), LES and LBM Capabilities
- Acoustic Solver
  - Linear Helmholtz Scattering Code
  - Permeable Surface Ffowcs Williams-Hawkings Propagation (FWH)

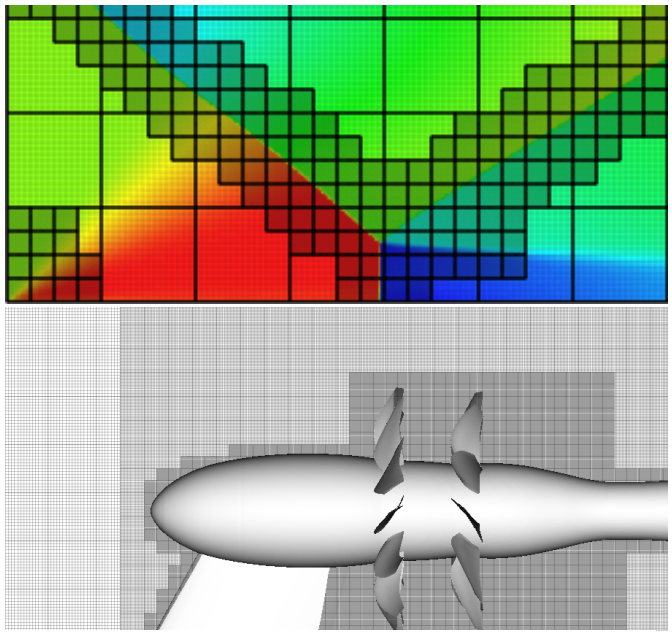

Cartesian Immersed Boundary

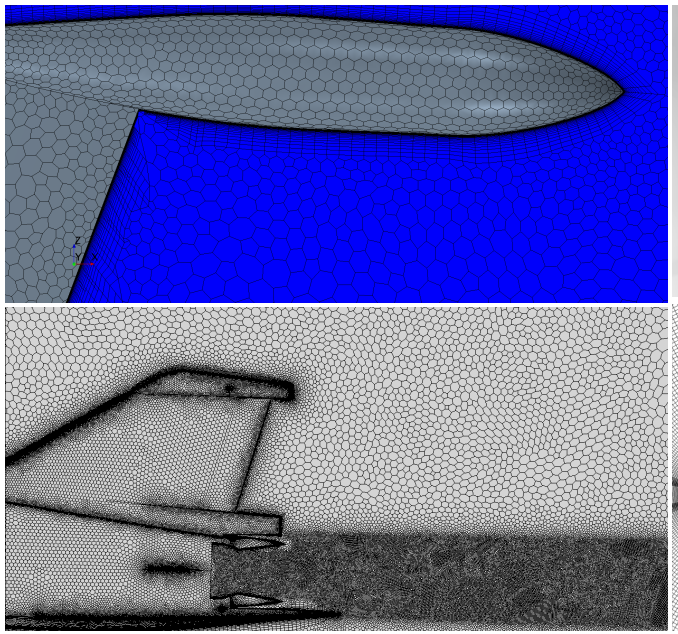

Unstructured Arbitrary Polyhedral

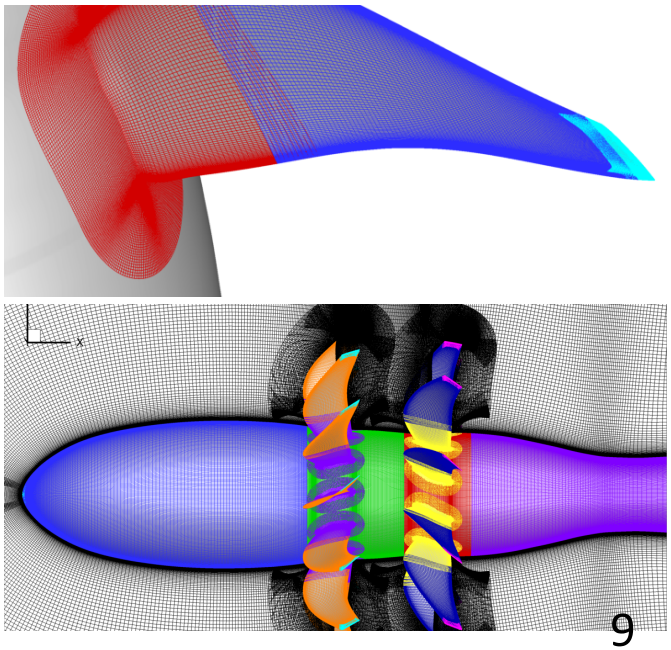


Overset Structured Curvilinear


Computational Methodology

LAVA Framework (Kiris et al. Aerospace Science and Technology, Volume 55, 2016)


- Computational Fluid Dynamics Solvers
  - Cartesian, **Curvilinear**, and Unstructured Grid Types
  - **Overset Grid** and Immersed Boundary Methods
  - Steady and **Unsteady RANS** (Reynolds-Averaged Navier-Stokes)
  - **Hybrid RANS/LES** (Large Eddy Simulation), LES and LBM Capabilities
- Acoustic Solver
  - Linear Helmholtz Scattering Code
  - **Permeable Surface Ffowcs Williams-Hawkings Propagation (FWH)**

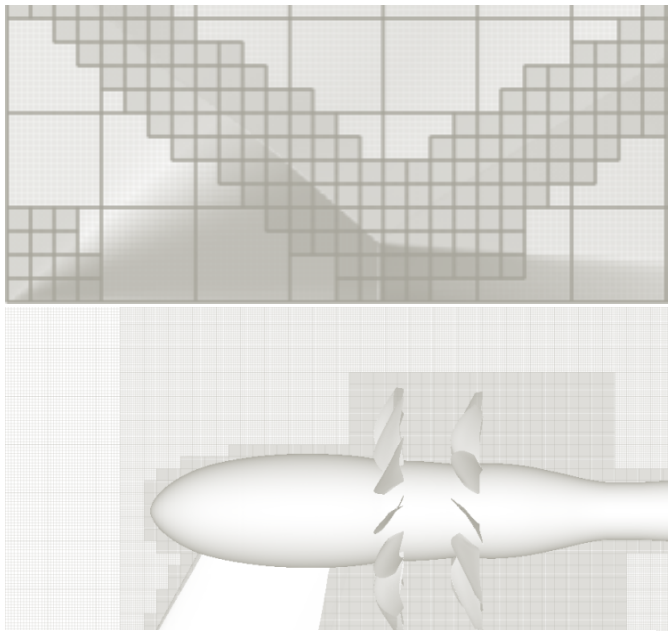

Cartesian Immersed Boundary

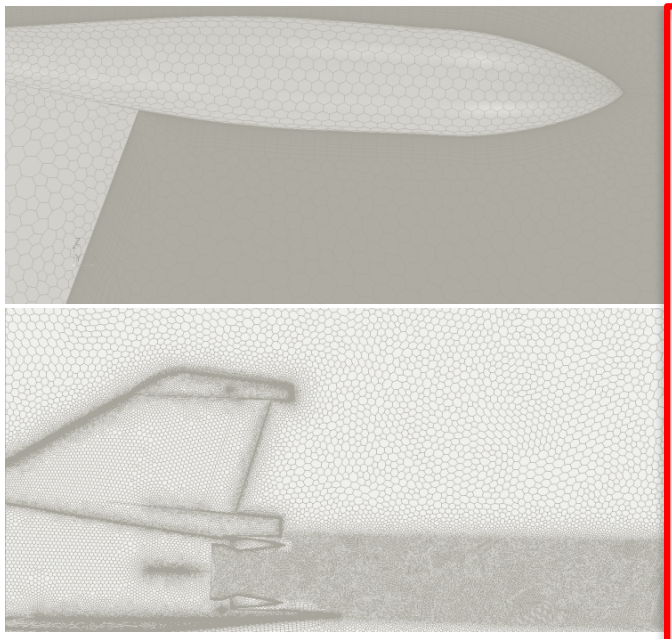

Unstructured Arbitrary Polyhedral

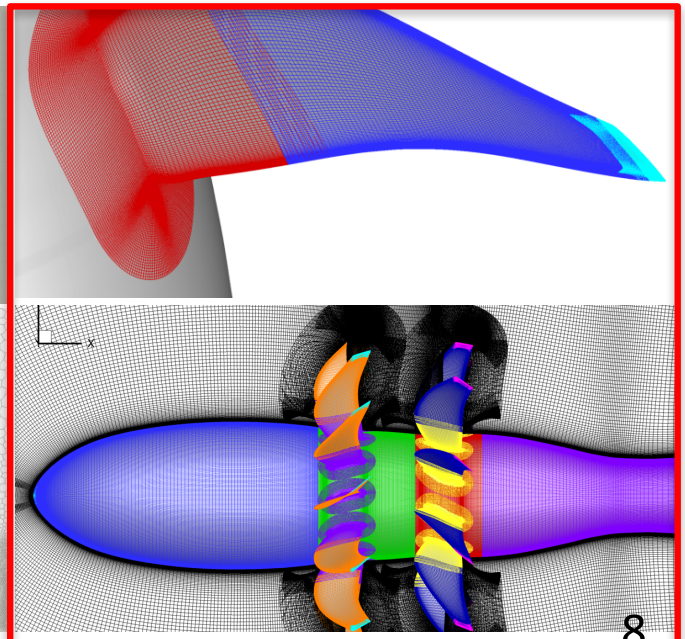

Overset Structured Curvilinear

Computational Methodology

Strategy for using CFD and CAA tools for evaluating noise from new low boom designs

- CFD (zonal approach):
  - RANS models for the aircraft
  - hybrid RANS/LES models for detached shear layers
  - wall-modeled LES for attached boundary layers near the nozzle exit

- CAA (propagation):
  - Ffowcs Williams-Hawkings (FWH) for far-field noise
  - Helmholtz boundary element method (BEM) for noise shielding effects

Computational Methodology

3-D Structured Curvilinear Overset Grid Solver

- Spalart-Allmaras turbulence model (baseline turbulence model)

Low-Dissipation Finite Difference Method (Housman et al. AIAA-2016-2963)

- 6th-order Hybrid Weighted Compact Nonlinear Scheme (HWCNS)
- Numerical flux is a modified Roe scheme
- $6^{th}/5^{th}$-order blended central/upwind biased left and right state interpolation
- 2^{nd}-order accurate differencing used for time and viscous flux discretization

Hybrid RANS/LES Models

- Delayed Detached Eddy Simulation (DDES) model with modified length scale (Housman et al. AIAA-2017-0640)
- Zonal RANS/NLES (numerical LES) with user selected zones of URANS, NLES, and wall-distance based hybrid RANS/NLES (see paper for details)

Synthetic Eddy Method

- *Coupling Methodology between RANS and LES to introduce realistic turbulent eddies (Jarrin et al. Int. Journal of Heat and Fluid Flow 30)*

Computational Methodology

Non-Zonal model (DDES):

- DES suffers from model stress depletion (forces transition to LES but mesh too coarse to resolve field)
- DDES remains in RANS mode in attached BL. Shielding function often shows strange behavior in transition (RANS -> LES -> RANS -> LES)
- Improved length scale (Shur, Spalart, Strelet): depletes eddy viscosity faster.
- Grey-Zone-Problem: mesh fine enough to trigger 3d fluctuations in the BL, but not fine enough to resolve largest scales in BL for accurate skin-friction.

Zonal model (Hybrid RANS/NLES):

- User defines zones of RANS, NLES and RANS/NLES
- Hybrid RANS/NLES includes a wall distance and y^+ based transition
- Grey-Zone-Problem is still an issue

$$f_d = 1 - \frac{1}{2}\left[1 - \tanh\left(\epsilon_d(d_{wall} - d_0)\right)\right]$$

d_{wall} : walldistance
d_0 : transition distance (user)
ϵ_d : blending (user)


Computational Methodology

- When transitioning from RANS to LES in wall-bounded flows it is necessary to insert meaningful three-dimensional content at the interface
- The synthetic eddy method (SEM) is one approach which adds eddies such that first and second order turbulent statistics can be recovered. (approx. from the RANS solution with Bradshaw hypothesis)


Jet Case SP 7

$$\Delta xSE_M = xex_{it} - xSEM$$

$$54\,\delta < \Delta xSEM < 55\,\delta$$

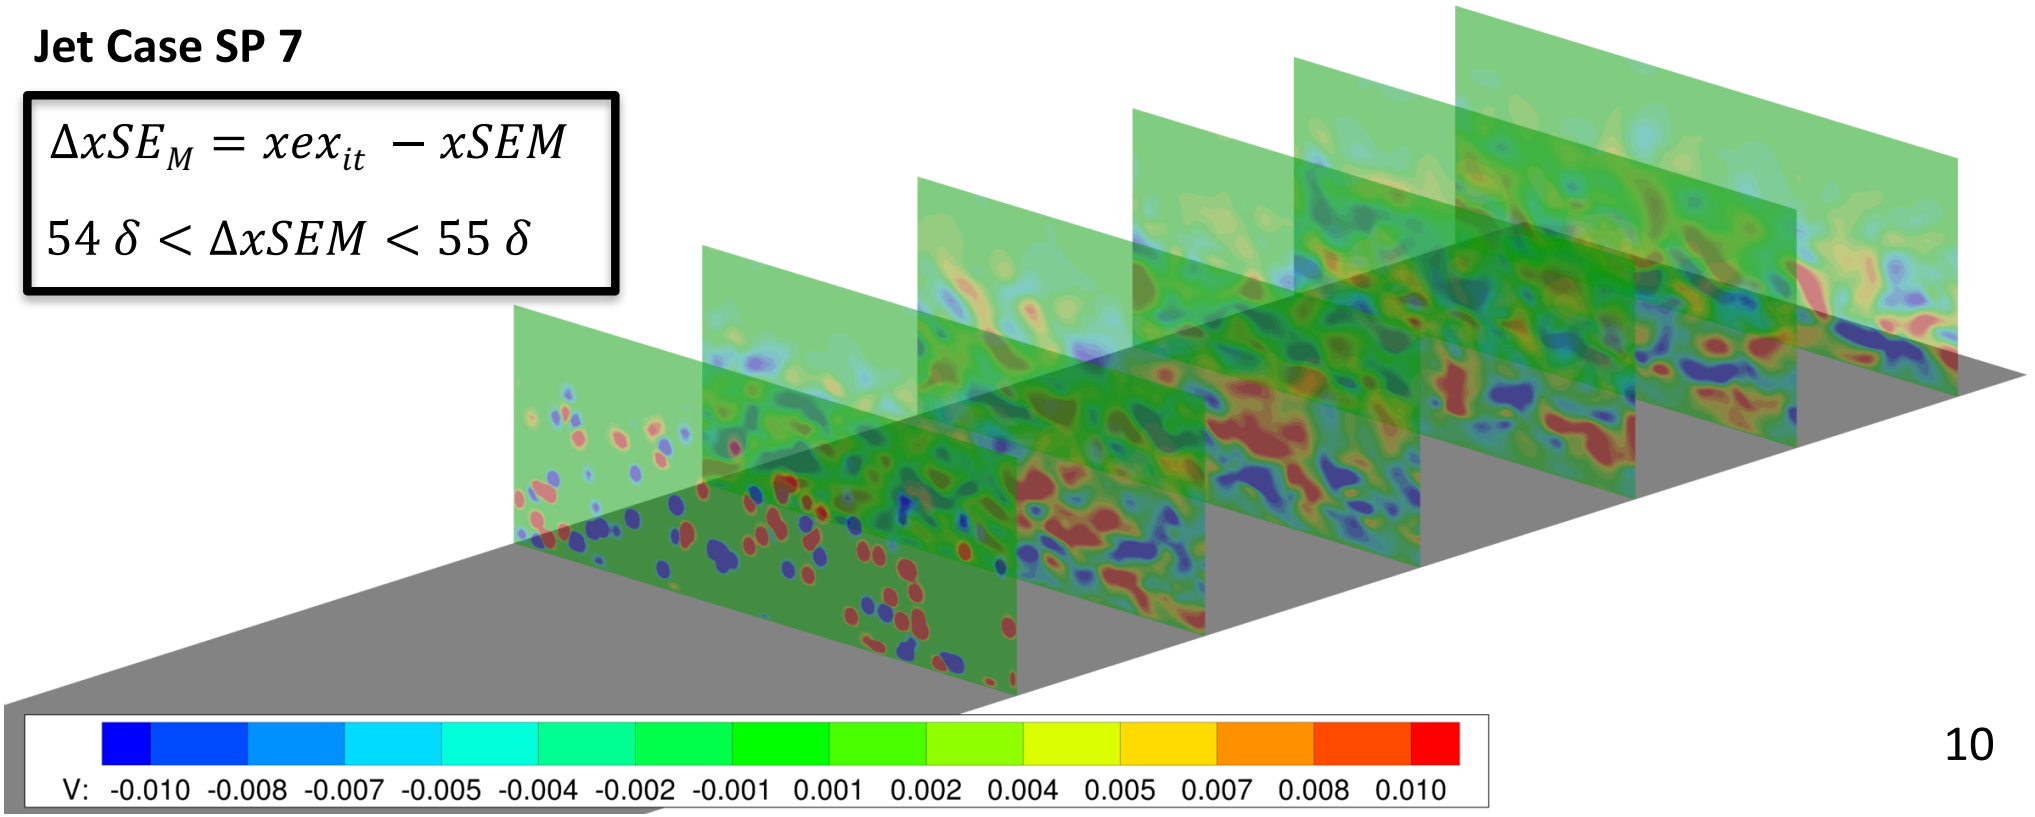

Computational Methodology

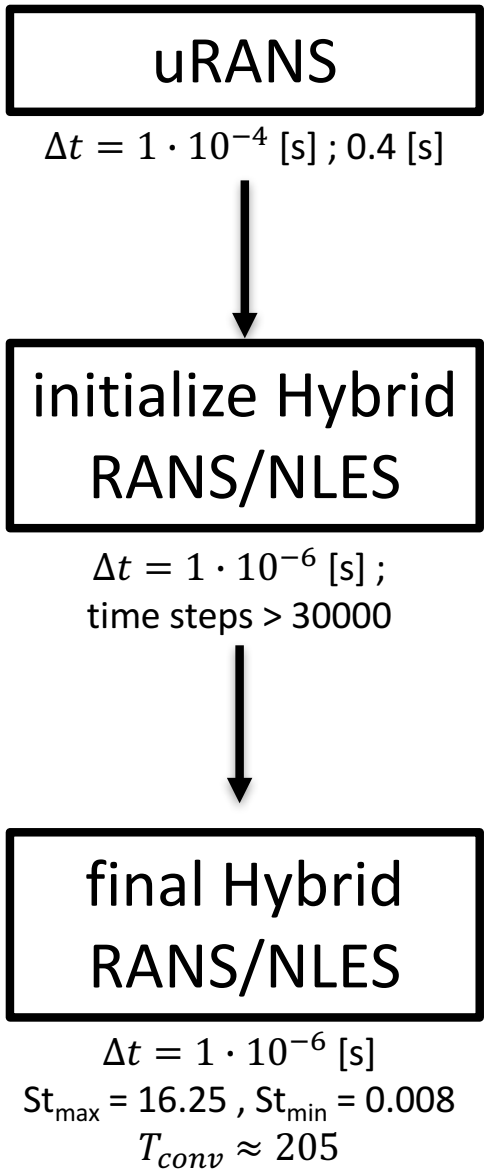

- Unsteady RANS until jet is fully developed and eddy viscosity maximum has plateaued
- Restart simulation with Hybrid RANS/NLES model activated
- Ignore transients from changing the model (30000 time-steps for this case)
- Record volume data at 100 kHz sampling frequency for greater than 0.02 seconds (approx. 205 convective time units)


	baseline	coarse	refined
Processors	1392 (has)	260 (ivy)	960 (has)
Wall-Clock Time [days]	12.5		
Sub-iterations	5		
Convergence	2-4 orders every time-step		
Number Eddies (SEM)	-	5000	5000

Outline




- Introduction
- Experimental Setup
- Computational Methodology
- **Structured Overset Grid System**
- Computational Results
  - Near-Field Comparison
  - Far-Field Comparison
- Summary
- Future Work

Structured Overset Grid System

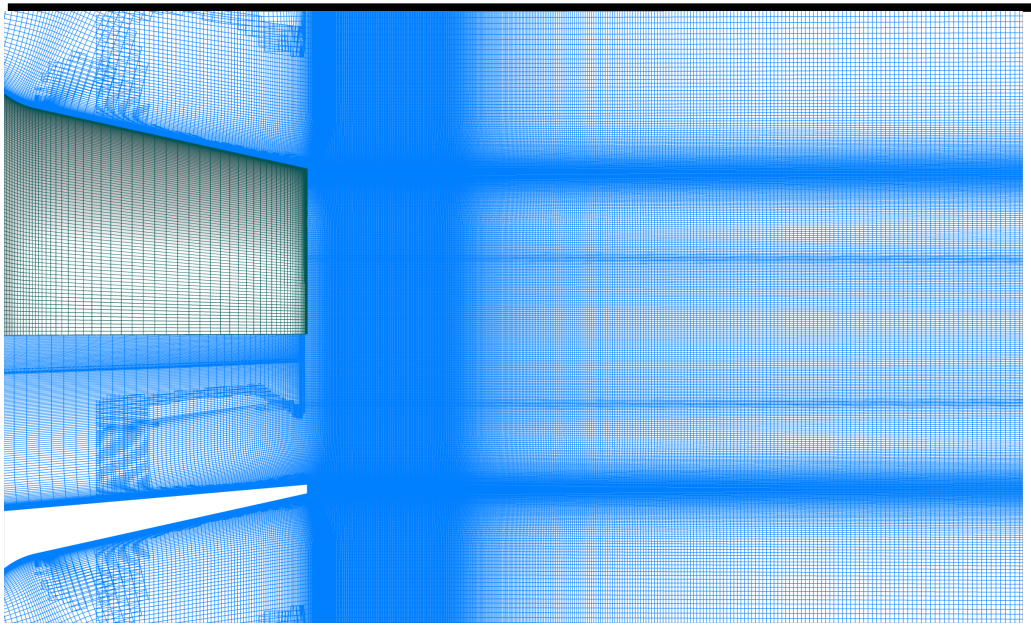


Baseline (256 M)

- Baseline (256 M)
- Coarse (28 M)
- Refined (106 M)
- Seven point overlap
- No orphan points
- Minimum stencil quality 0.9
- Baseline follows Bogey et. al (AIAA-2016-0261)

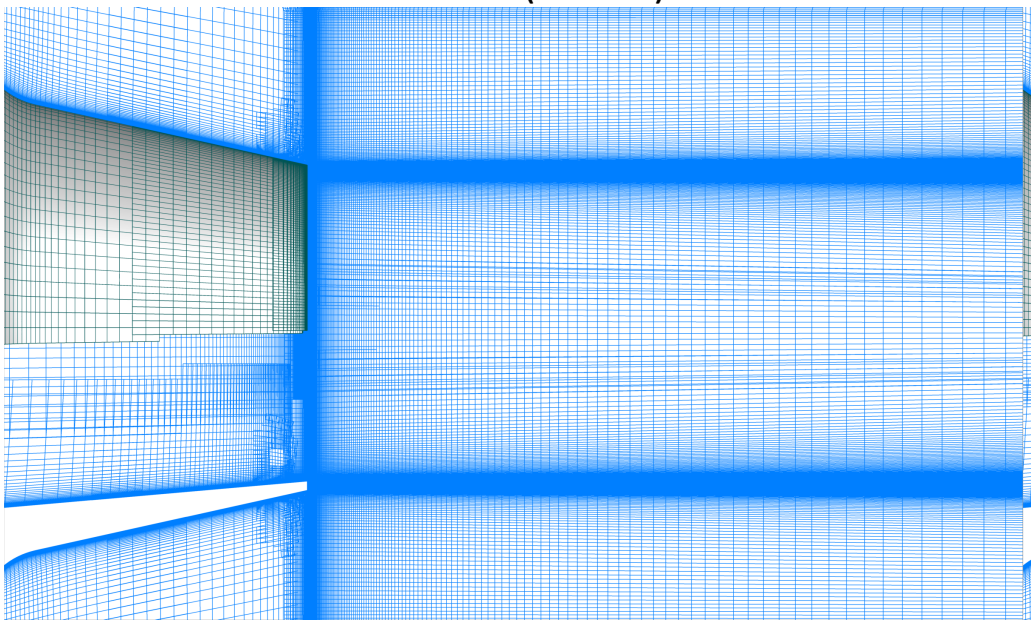


Coarse (28 M)

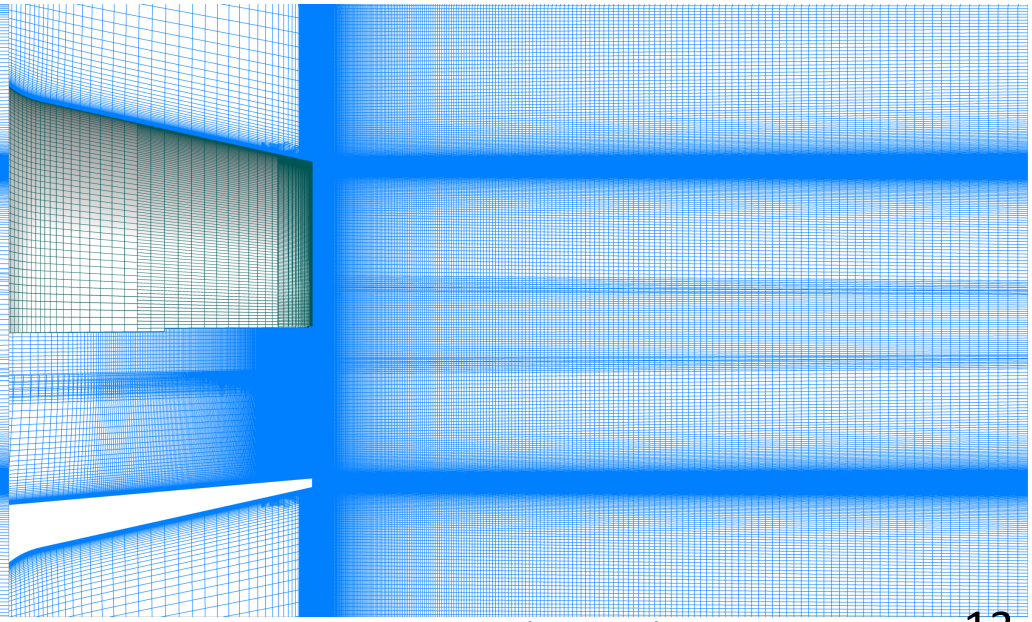


Refined (106 M)

Structured Overset Grid System

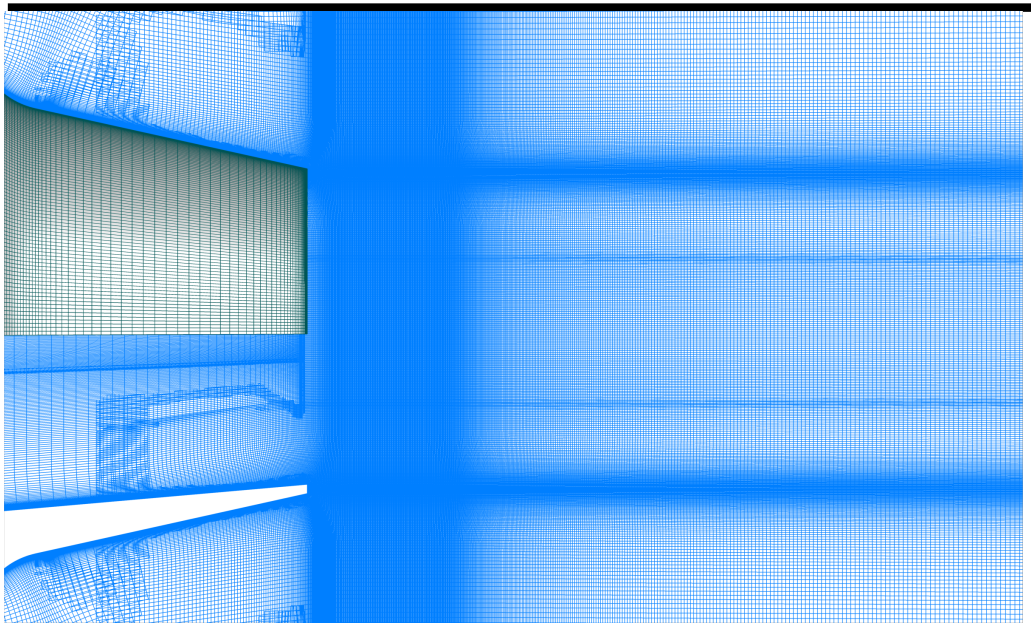


Baseline (256 M)

- Circumferential refinement in axial and radial direction
  Bres *et. al.* (AIAA-2015-2535)

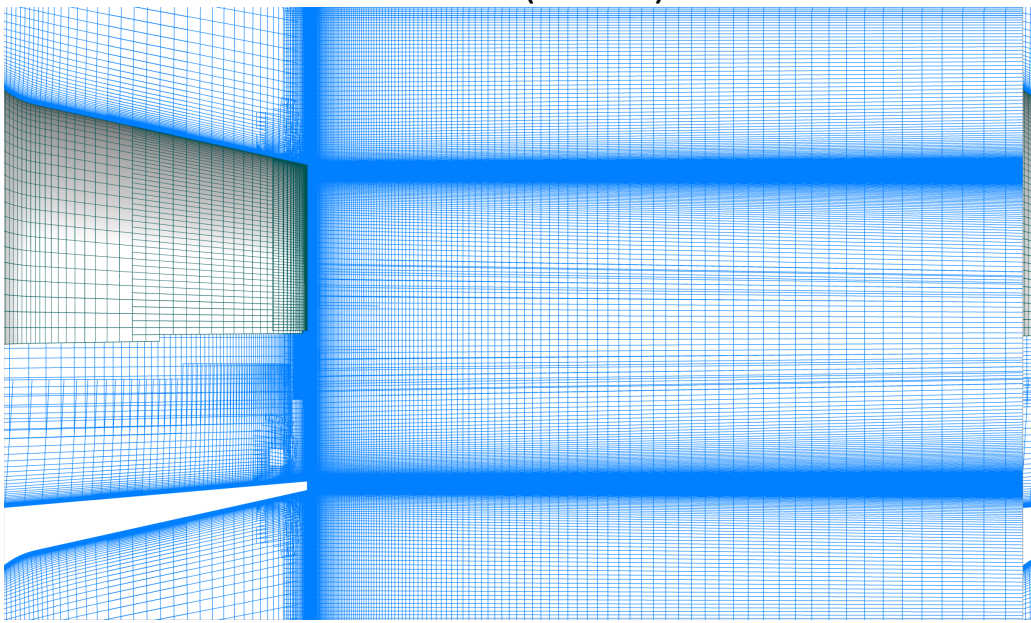


Coarse (28 M)

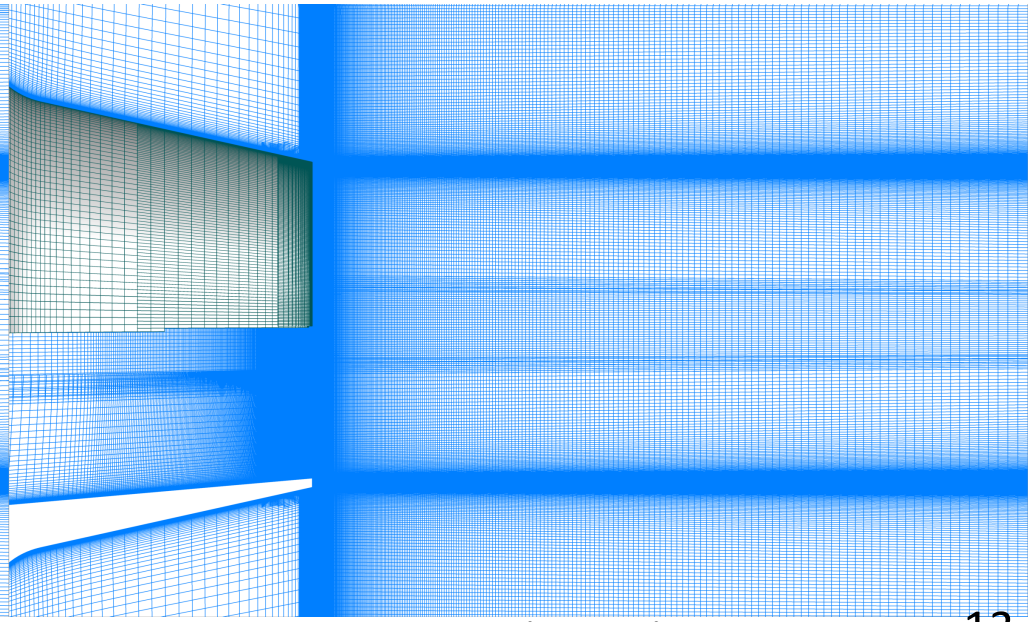


Refined (106 M)

Structured Overset Grid System

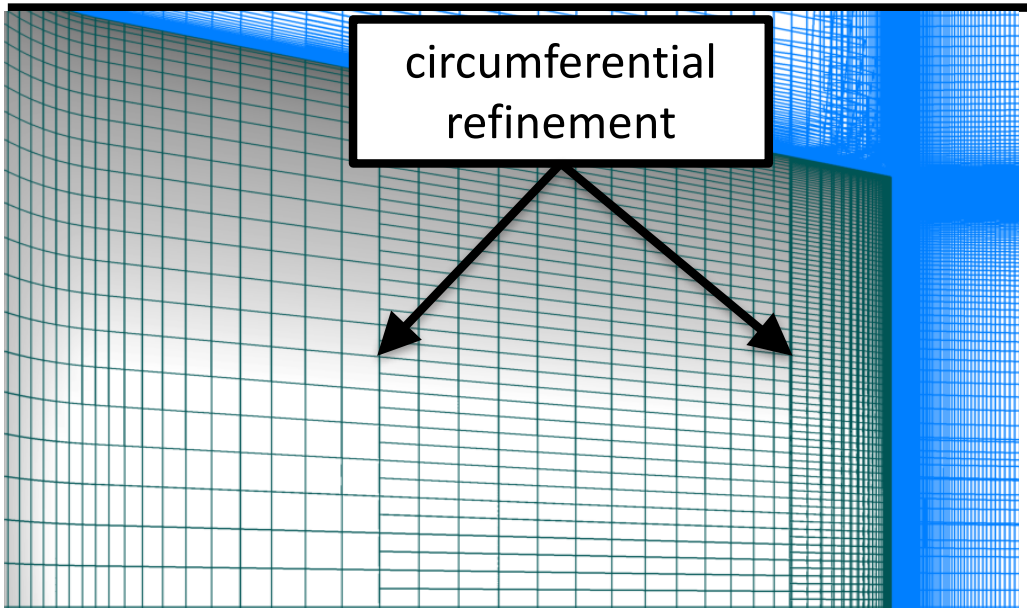


- Circumferential refinement in axial and radial direction
  Bres *et. al.* (AIAA-2015-2535)

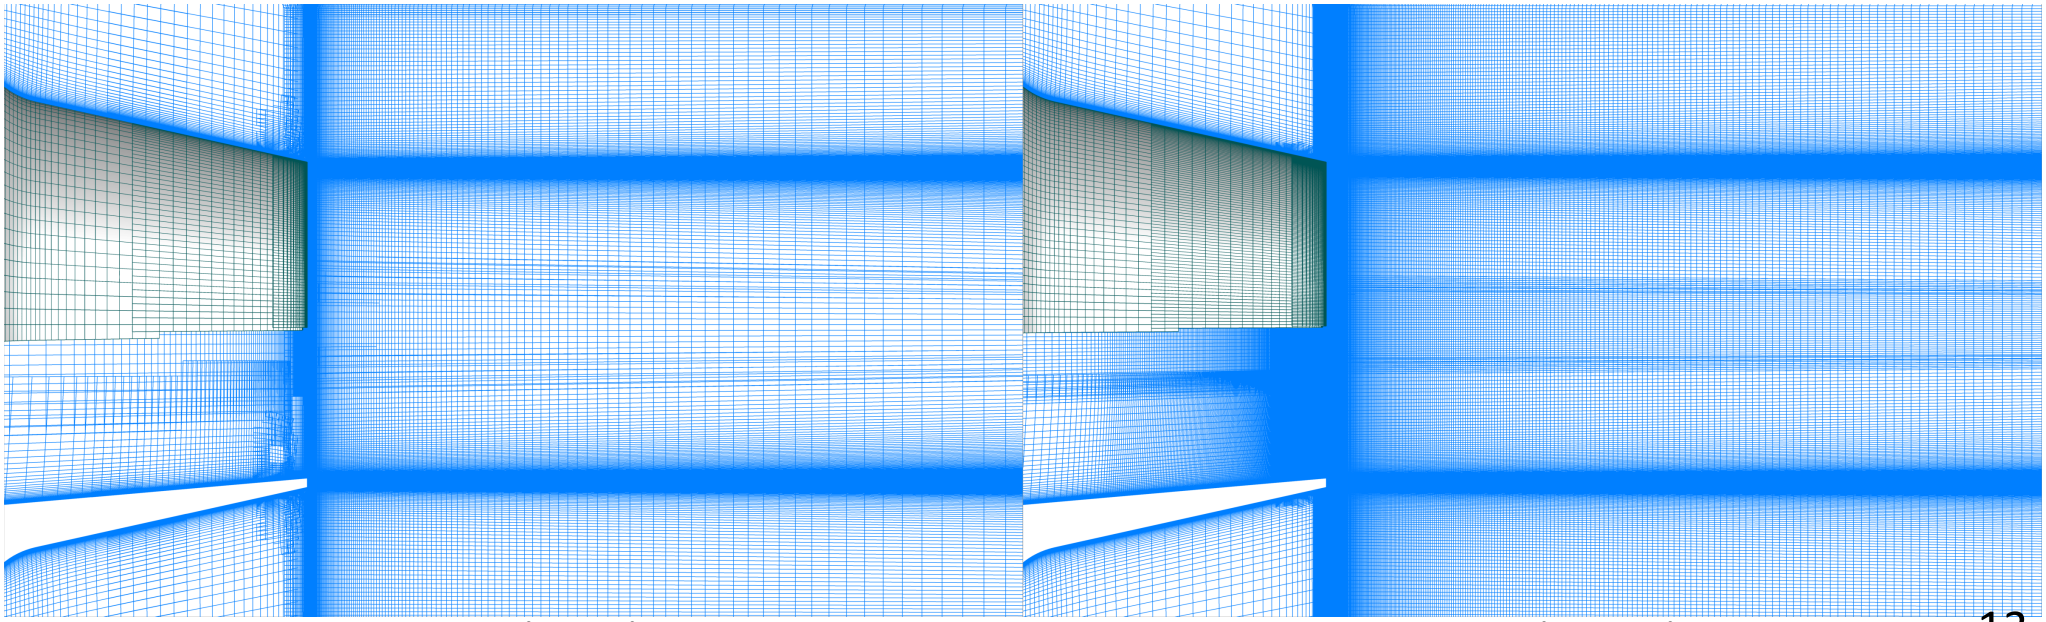


Coarse (28 M)


Refined (106 M)

Structured Overset Grid System

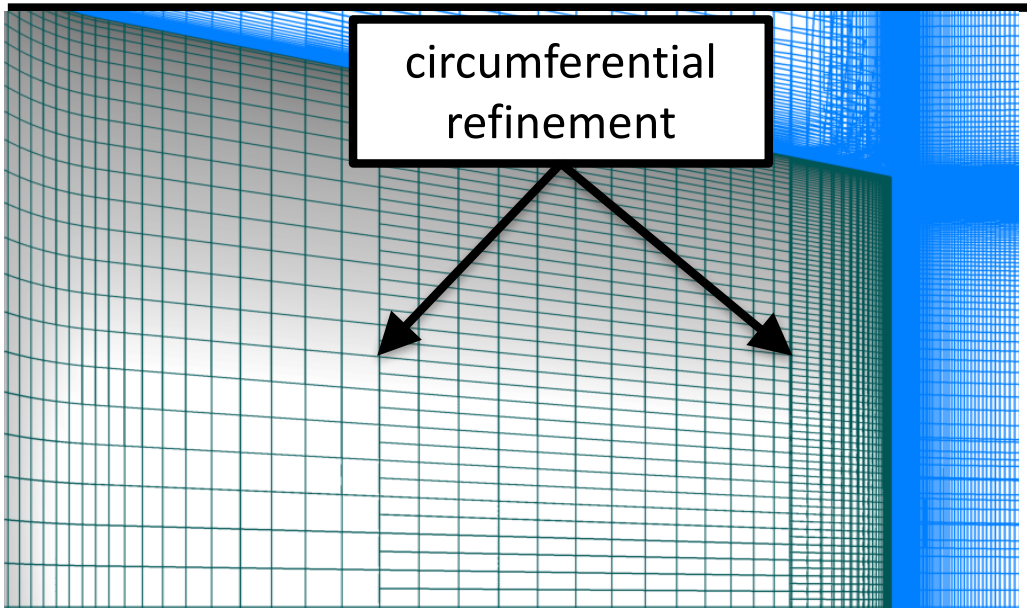

- Circumferential refinement in axial and radial direction
  Bres *et. al.* (AIAA-2015-2535)

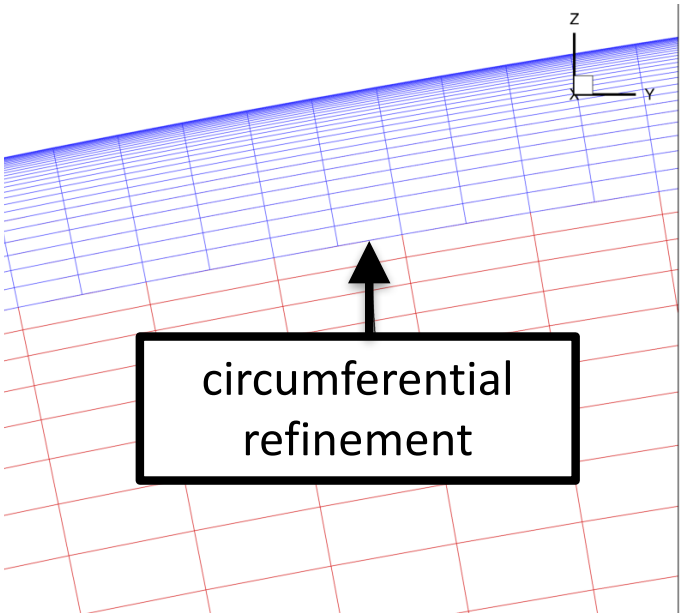

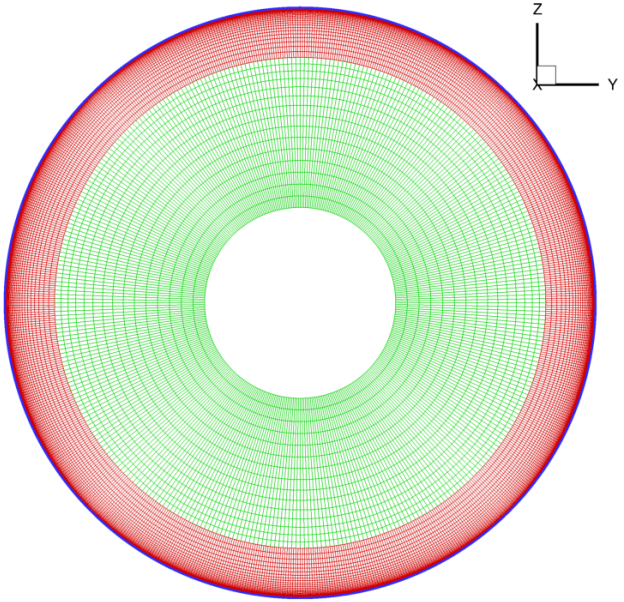

coarse | refined


90 | 180

180 | 360

360 | 720

baseline 360

Structured Overset Grid System

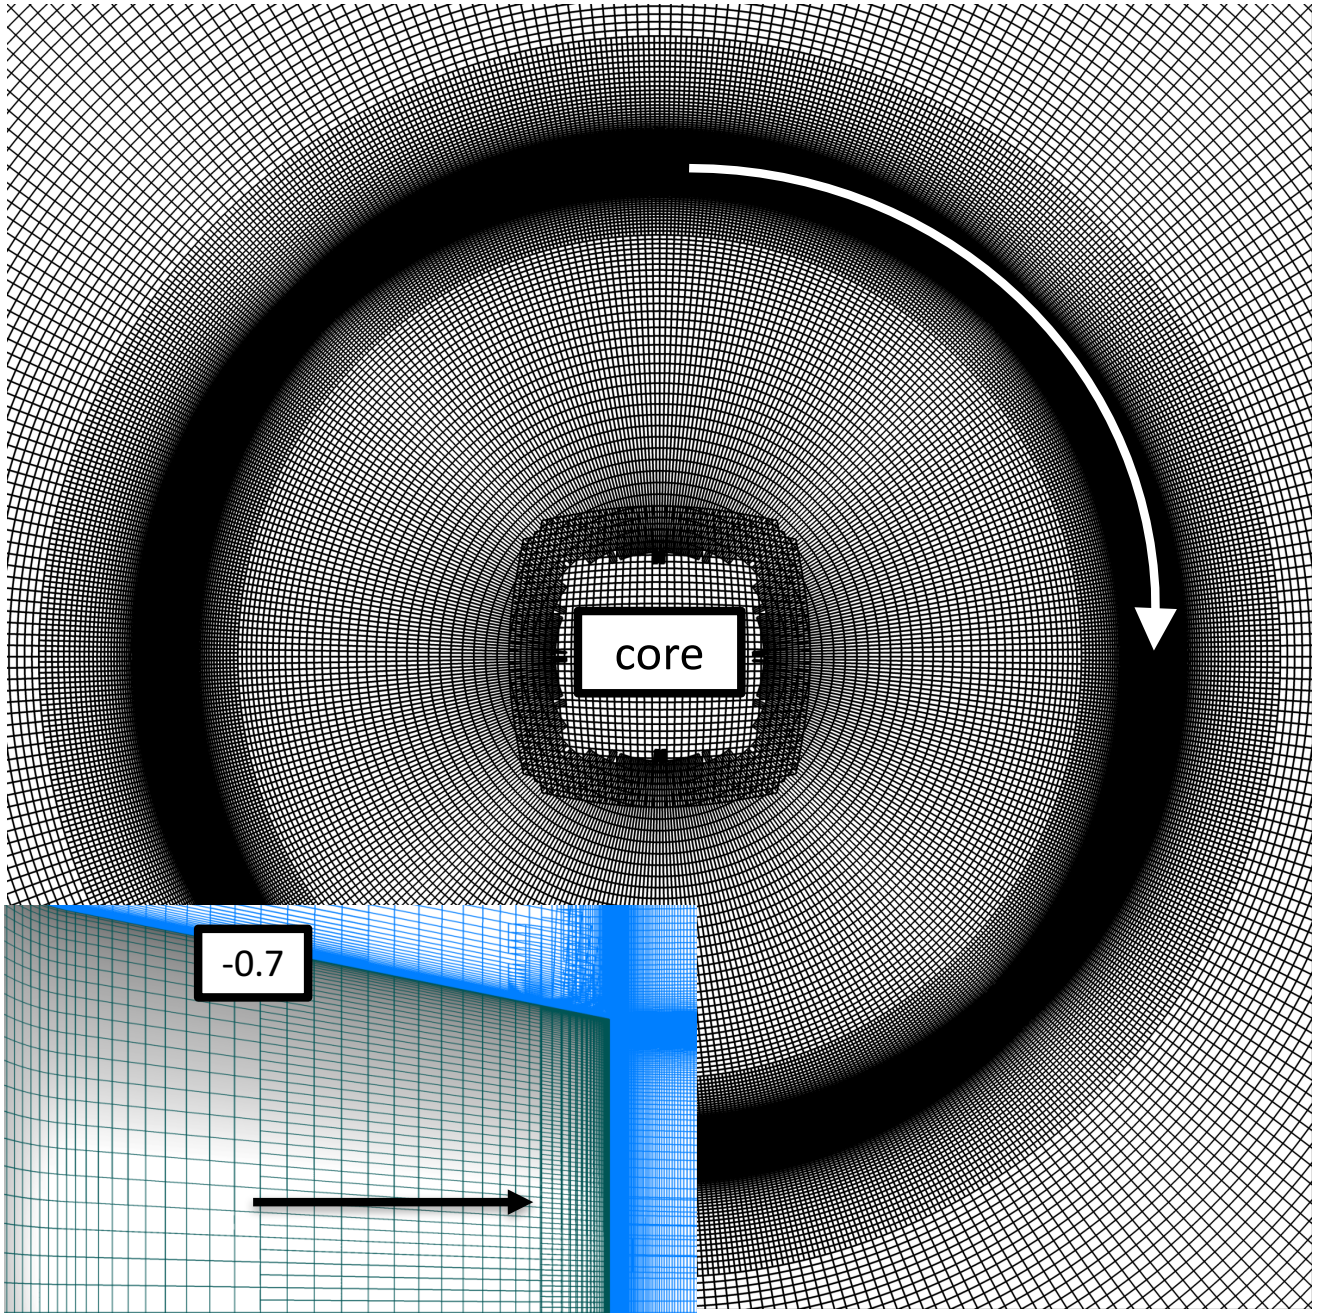


axial/radial AR


	$(x-x_{exit})/D$	AR
wall	-0.7	321.15
core	-0.7	0.50
wall	0.0	34.50
core	0.0	0.06
shear	0.5 – 25.0	10.50
core	0.5 – 25.0	1.05


circumferential/radial AR

	$(x-x_{exit})/D$	AR
wall	-0.7	436.82
core	-0.7	1.00
wall	0.0	221.00
core	0.0	1.00
shear	0.5 – 25.0	1134
core	0.5 – 25.0	1.00

Structured Overset Grid System

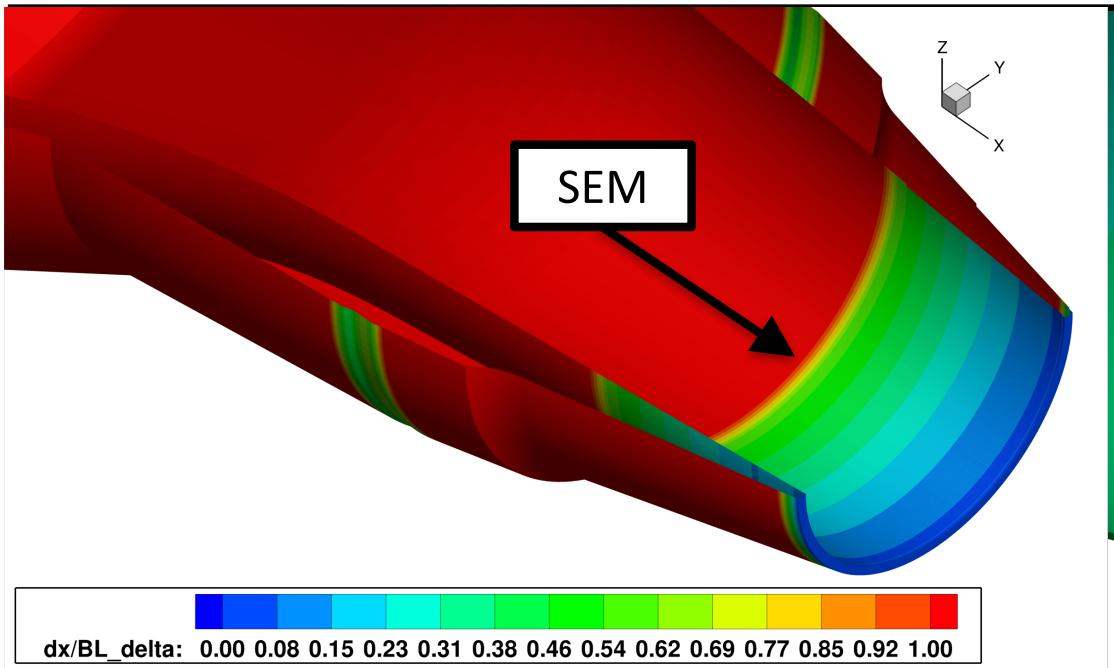

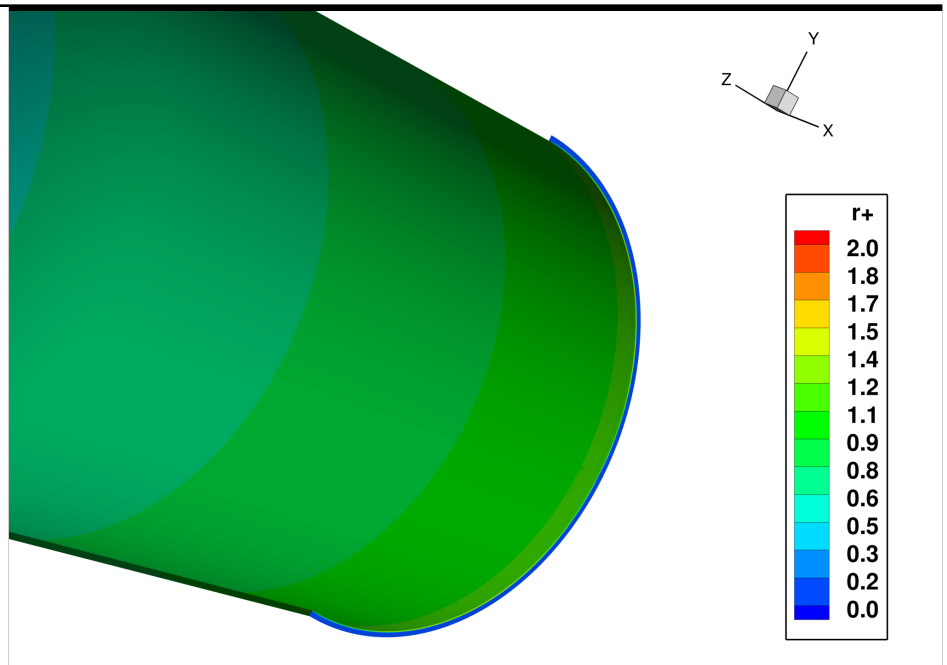

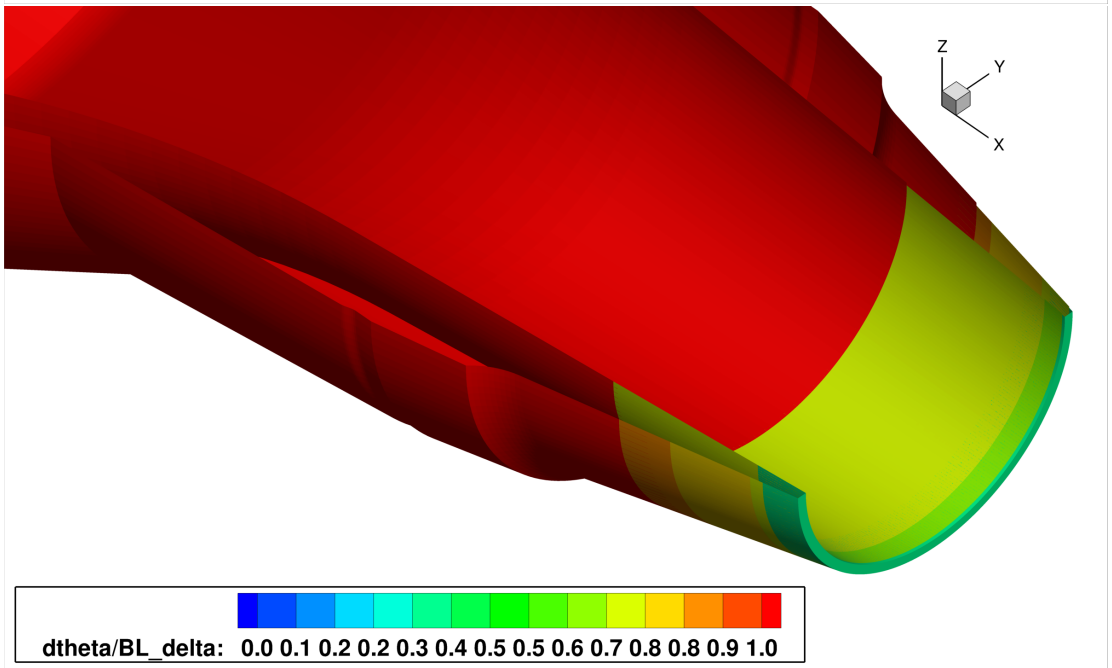


- Streamwise and circumferential spacing plotted relative to nozzle exit boundary layer thickness
- These spacings are much coarser than recommended spacings for wall-modeled LES
- Wall-normal spacing plotted in viscous plus units and appears sufficient for the RANS model used throughout the boundary layer

Outline




- Introduction
- Experimental Setup
- Computational Methodology
- Structured Overset Grid System
- **Computational Results**
  - Near-Field Comparison
  - Far-Field Comparison
- Summary
- Future Work

Computational Results

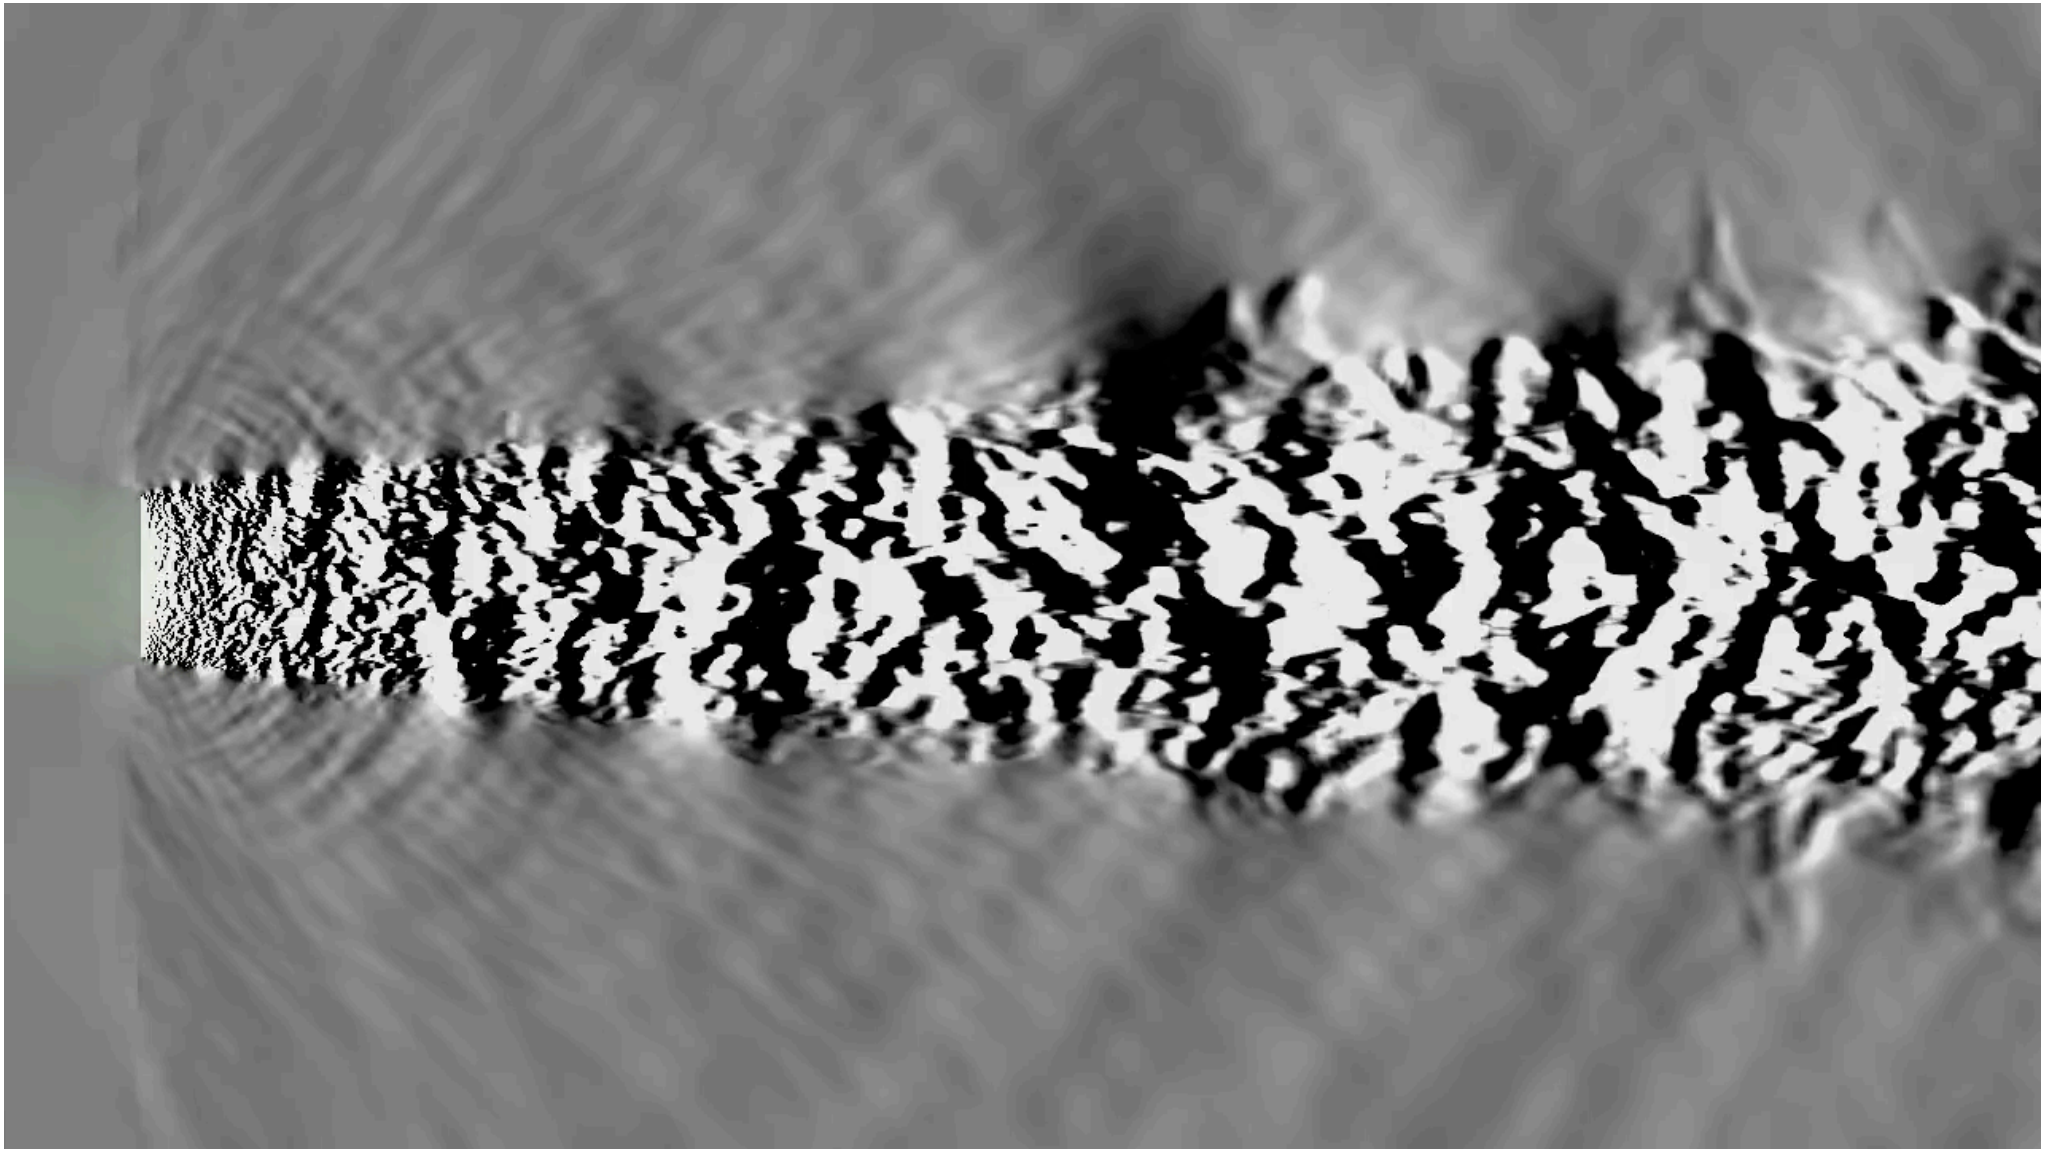



Computational Results

Flow Field Visualization: Iso-contours of Q-criteria colored by axial velocity

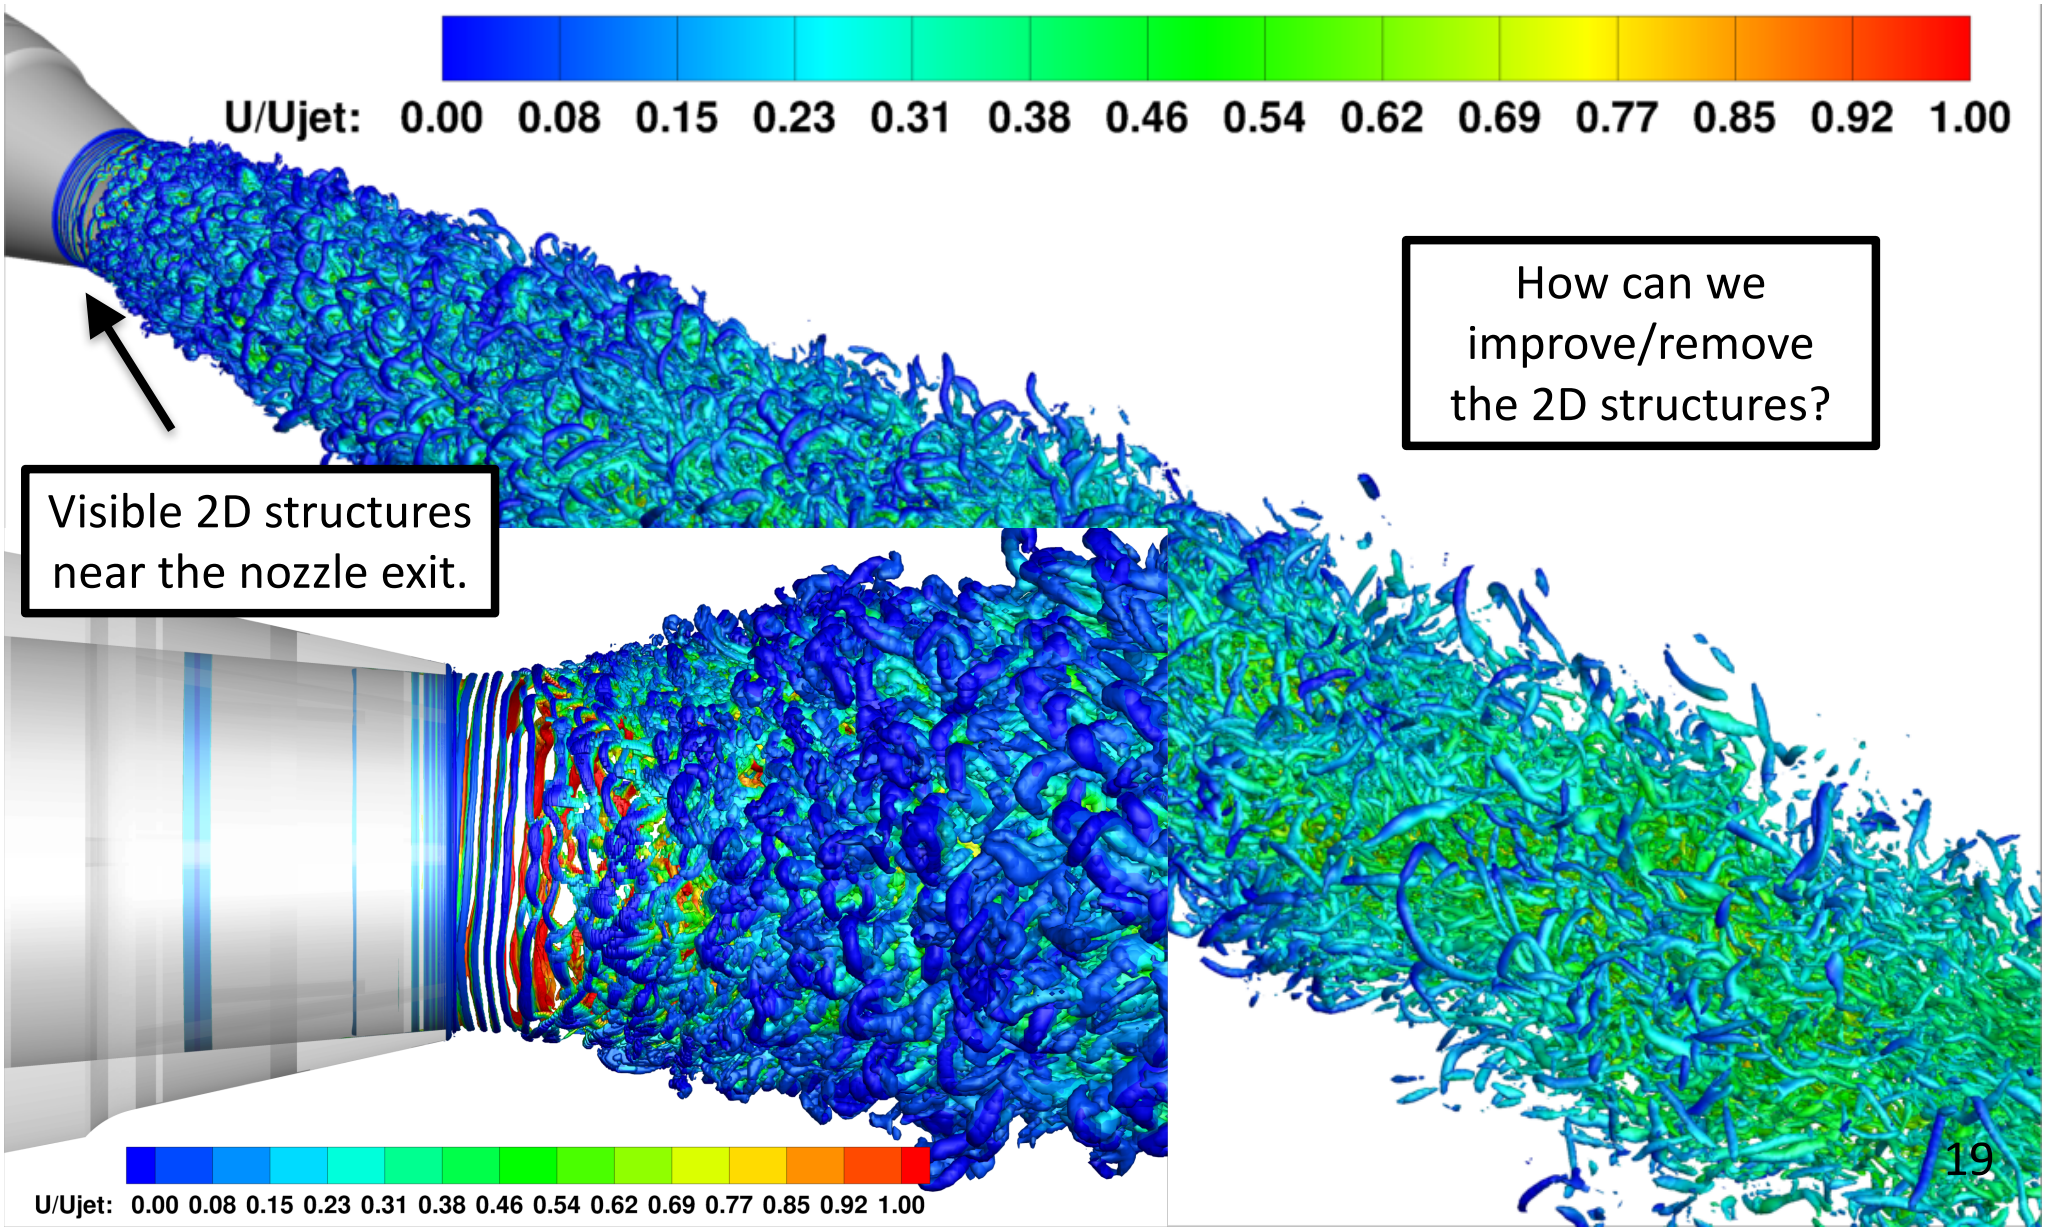

Computational Results

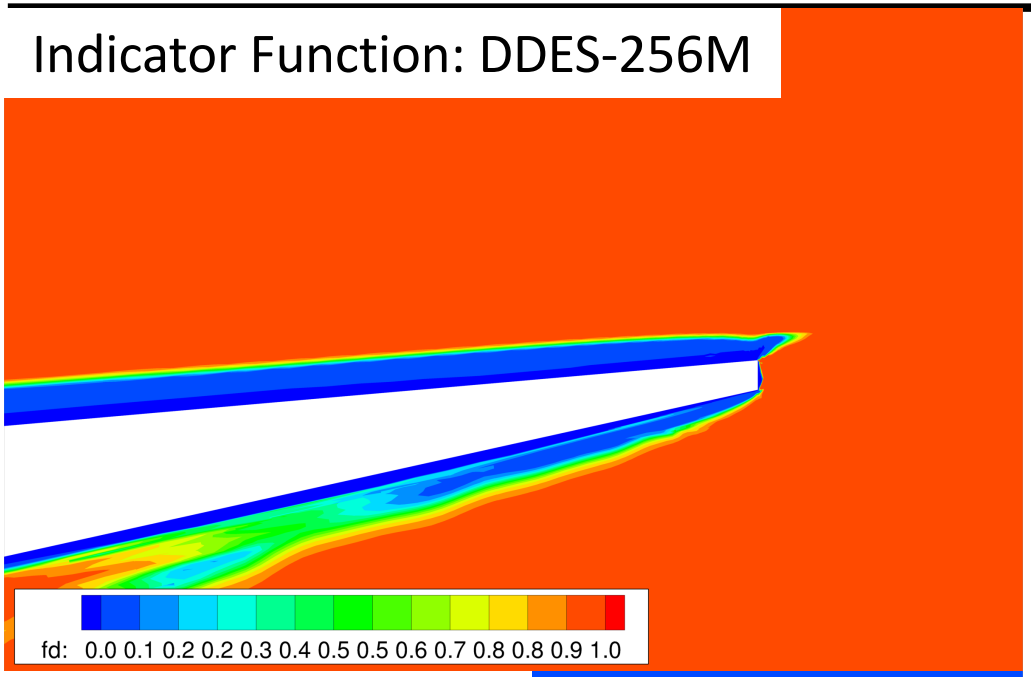

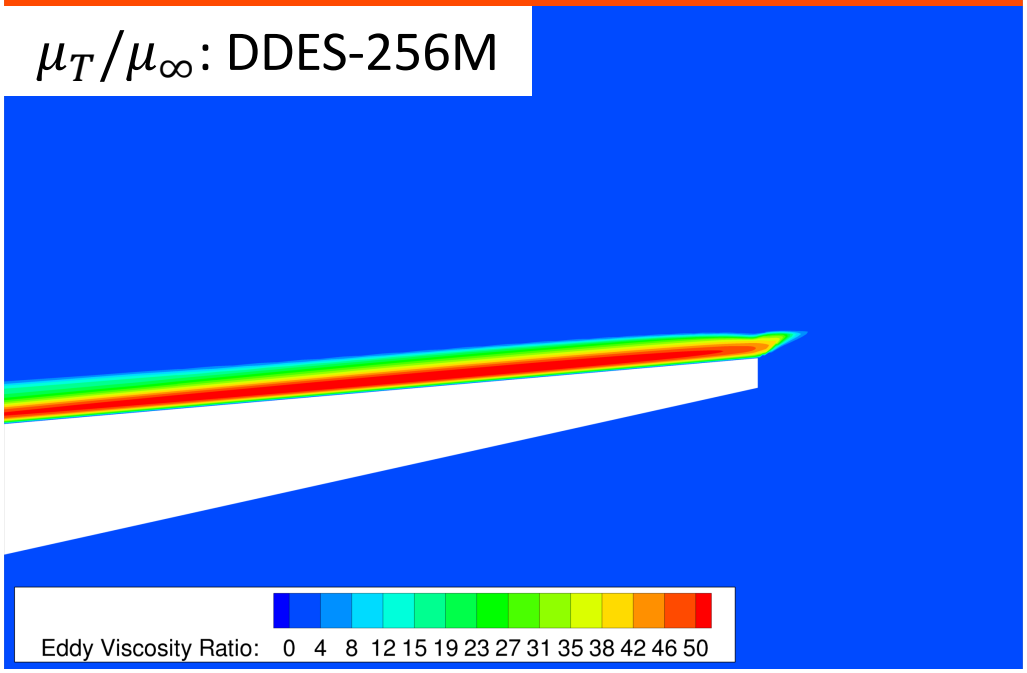

- Indicator function f_d indicates RANS or LES mode.
- Stays in RANS mode in nozzle interior and quickly transitions to LES downstream of nozzle lip
- Retains large eddy viscosity throughout the boundary layer


- Shielding function RANS-NLES:

$$f_d = 1 - \frac{1}{2}\left[1 - \tanh\left(\epsilon_d(d_{wall} - d_0)\right)\right]$$


d_{wall} : walldistance
d_0 : transition distance (user)
ϵ_d : blending (user)

Computational Results


Indicator Function: DDES-256M

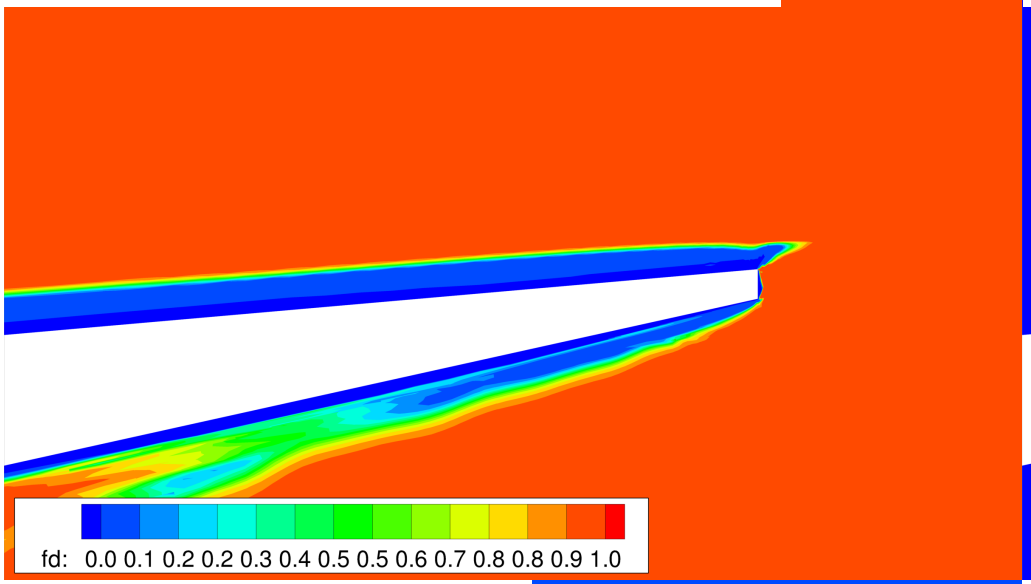


Indicator Function: RANS-NLES-SEM-106M

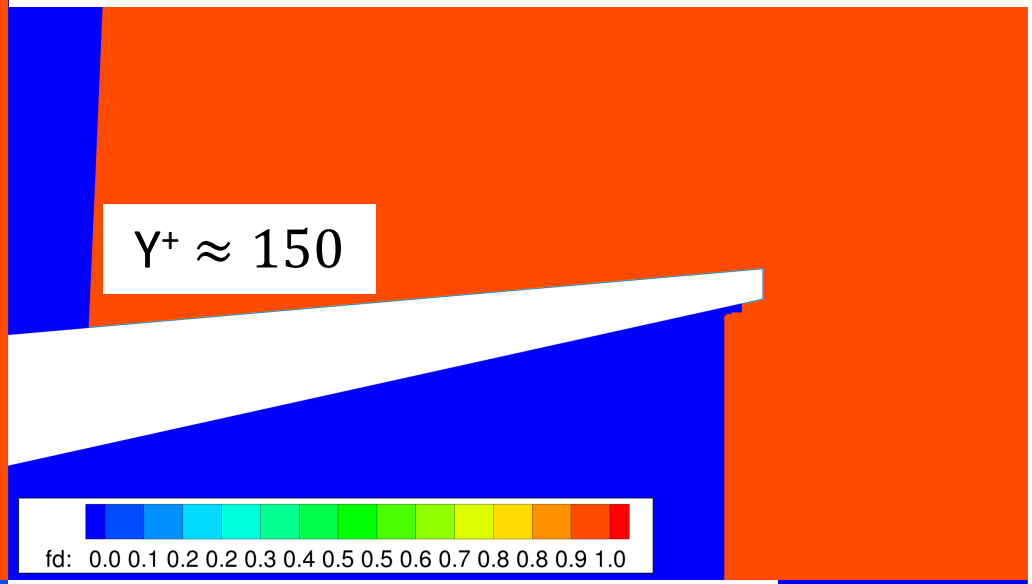


μ_T/μ_∞: DDES-256M

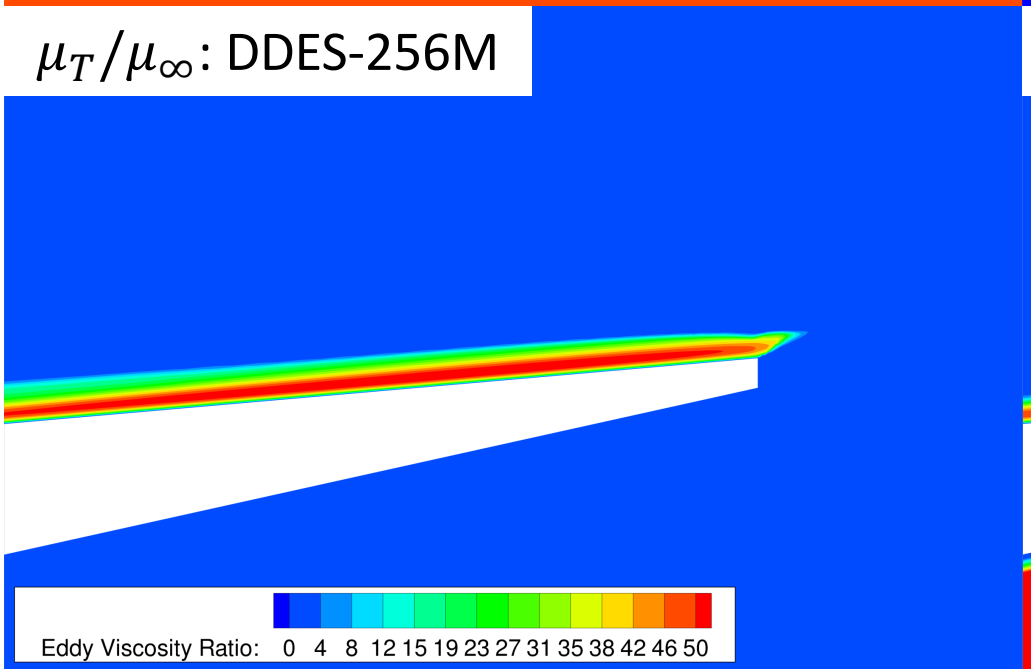

μ_T/μ_∞: RANS-NLES-SEM-106M

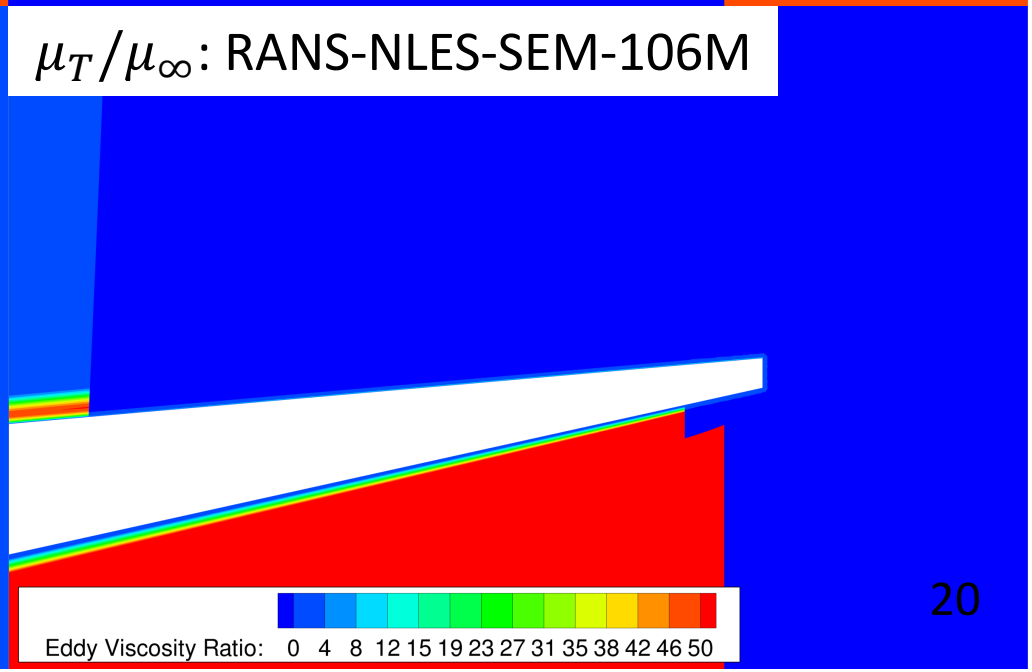



Computational Results

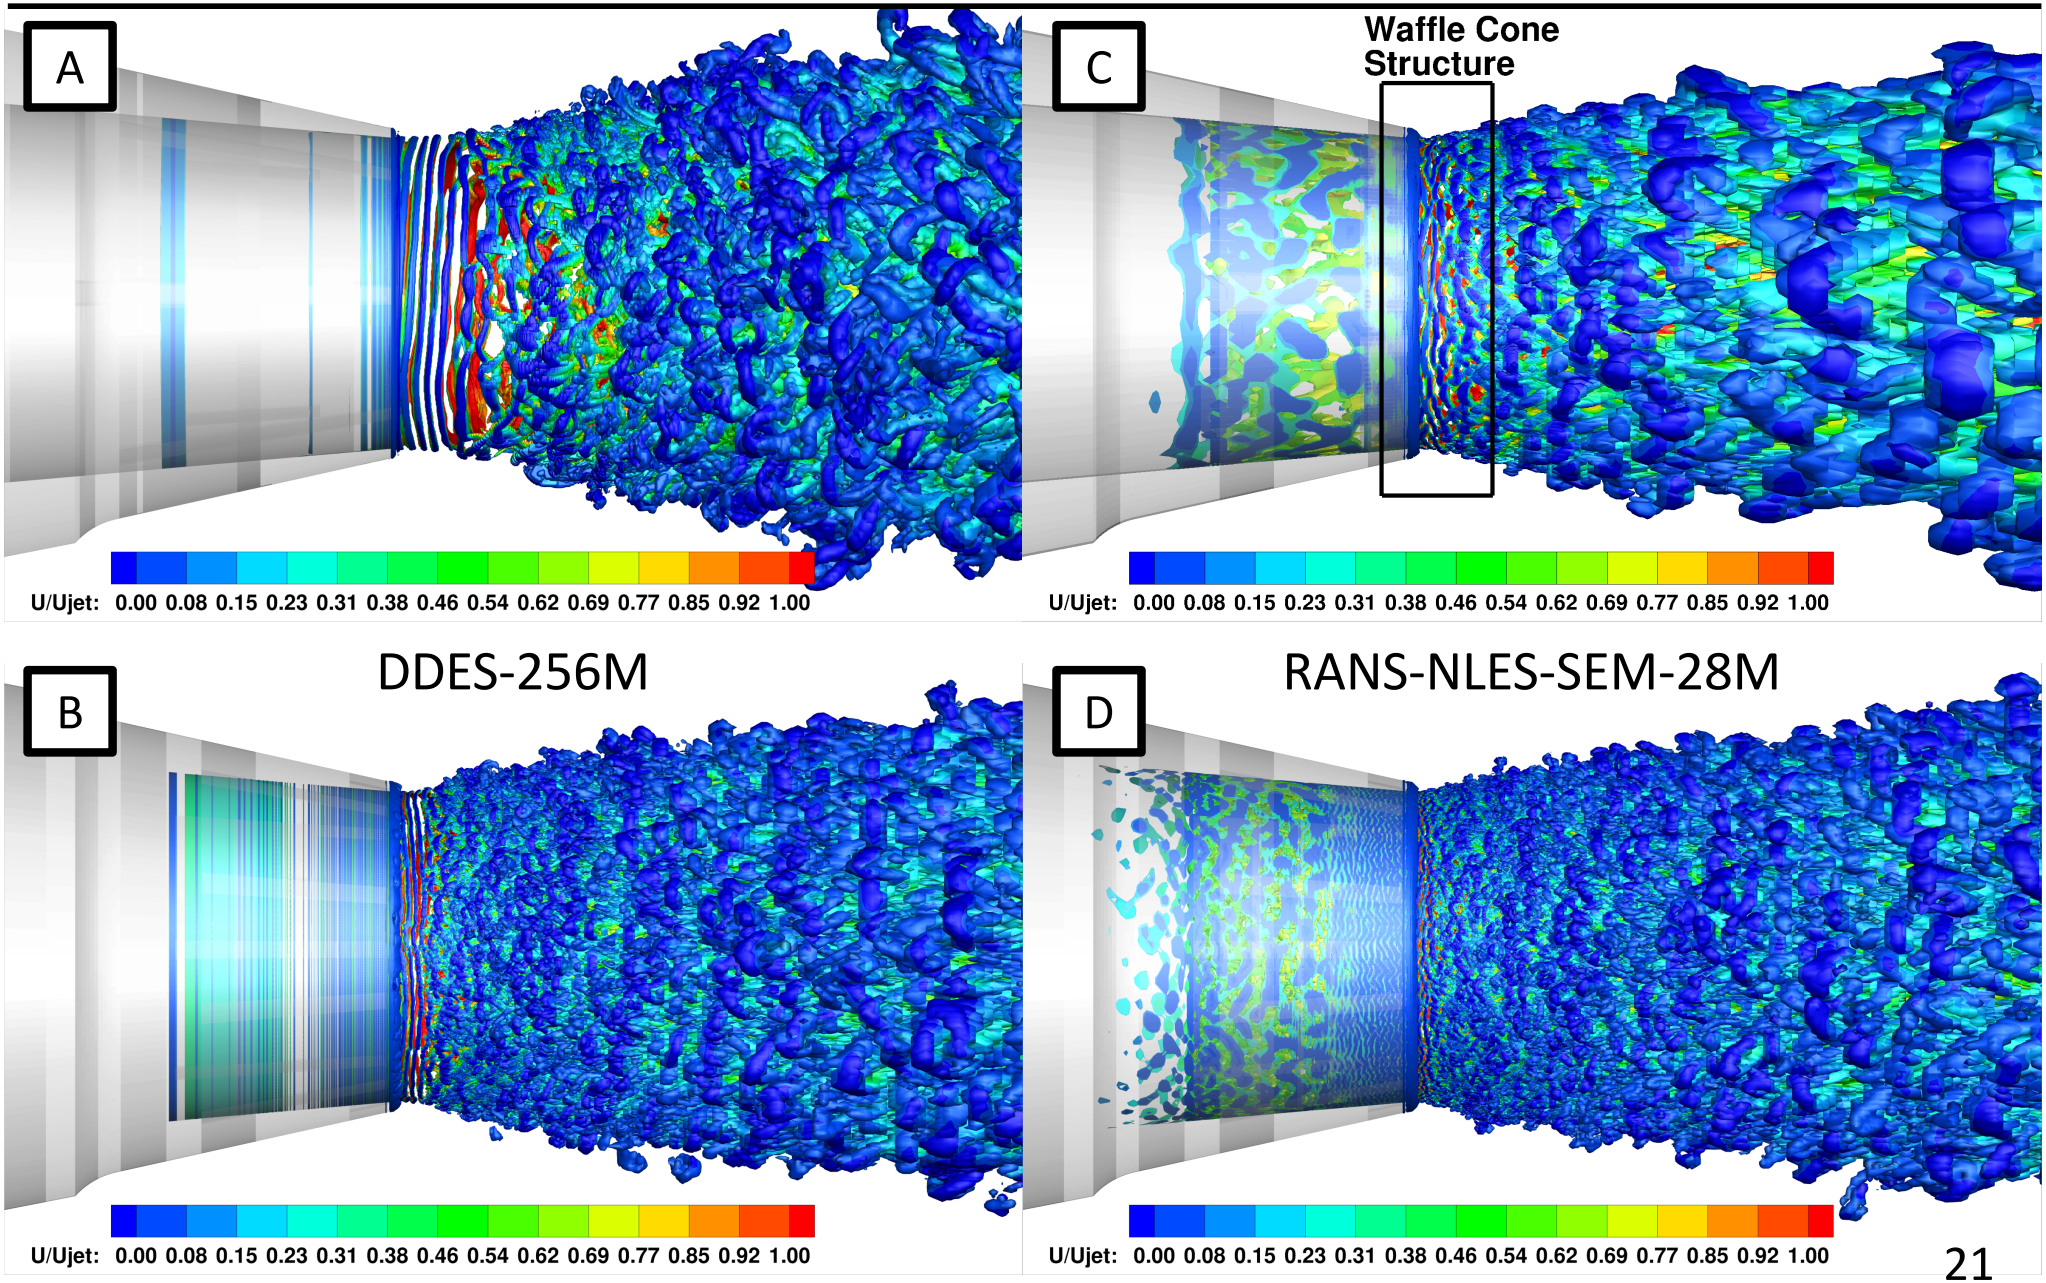

Computational Results

RANS-NLES-SEM Refined Mesh

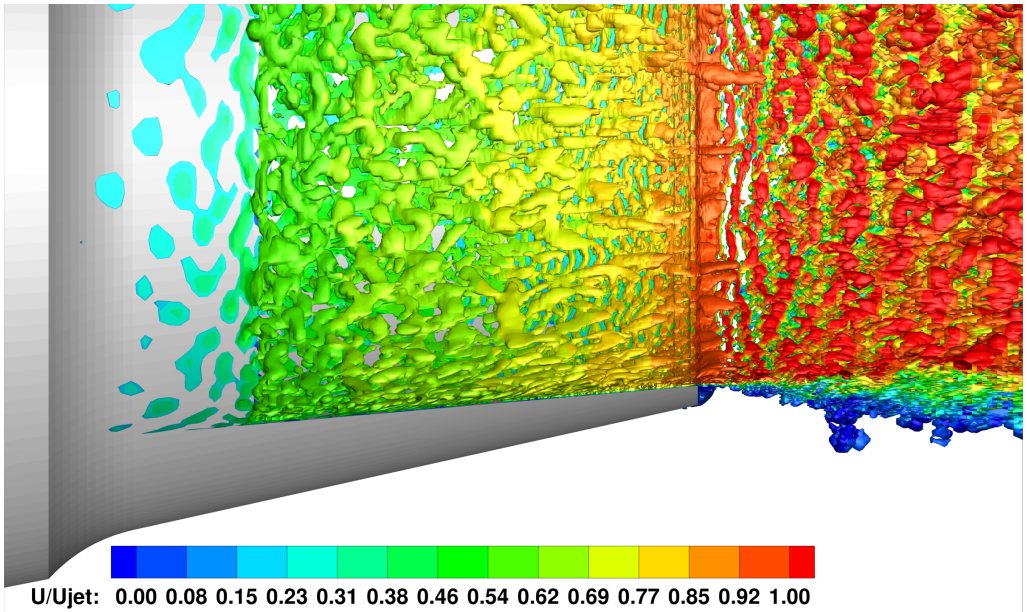


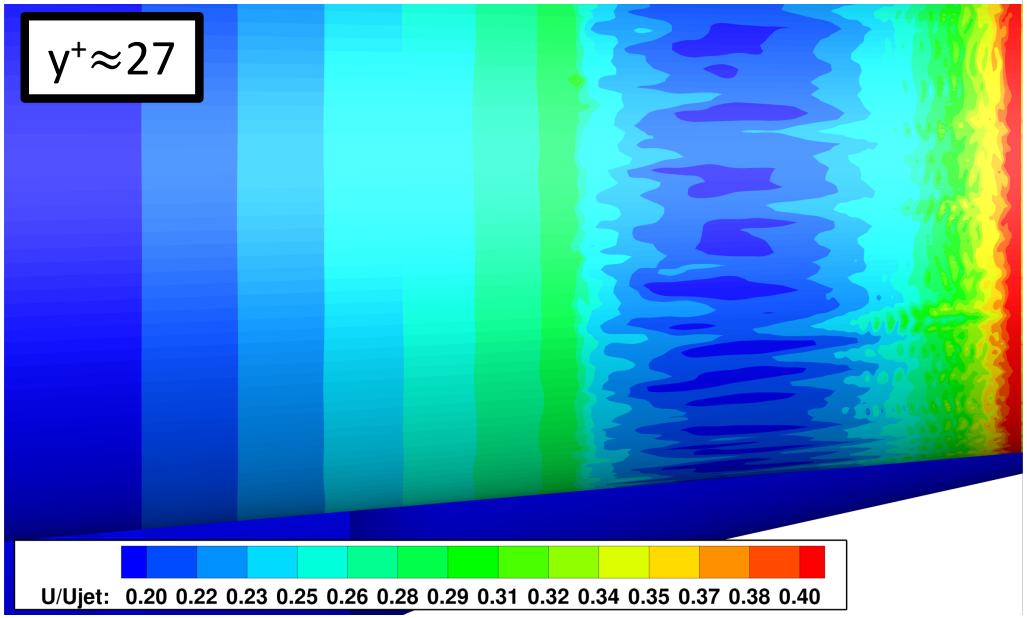

- Quasi-2D waffle cone structures at nozzle exit
- Size of turbulent structures appears to be too large inside nozzle
- Structures deep in the boundary layer show very little azimuthal variation
- Features are elongated and too highly correlated in both the streamwise and azimuthal direction
- Do we have realistic, fully developed BL turbulence at the exit?


Computational Results – Near-Field

Near-Field Comparison

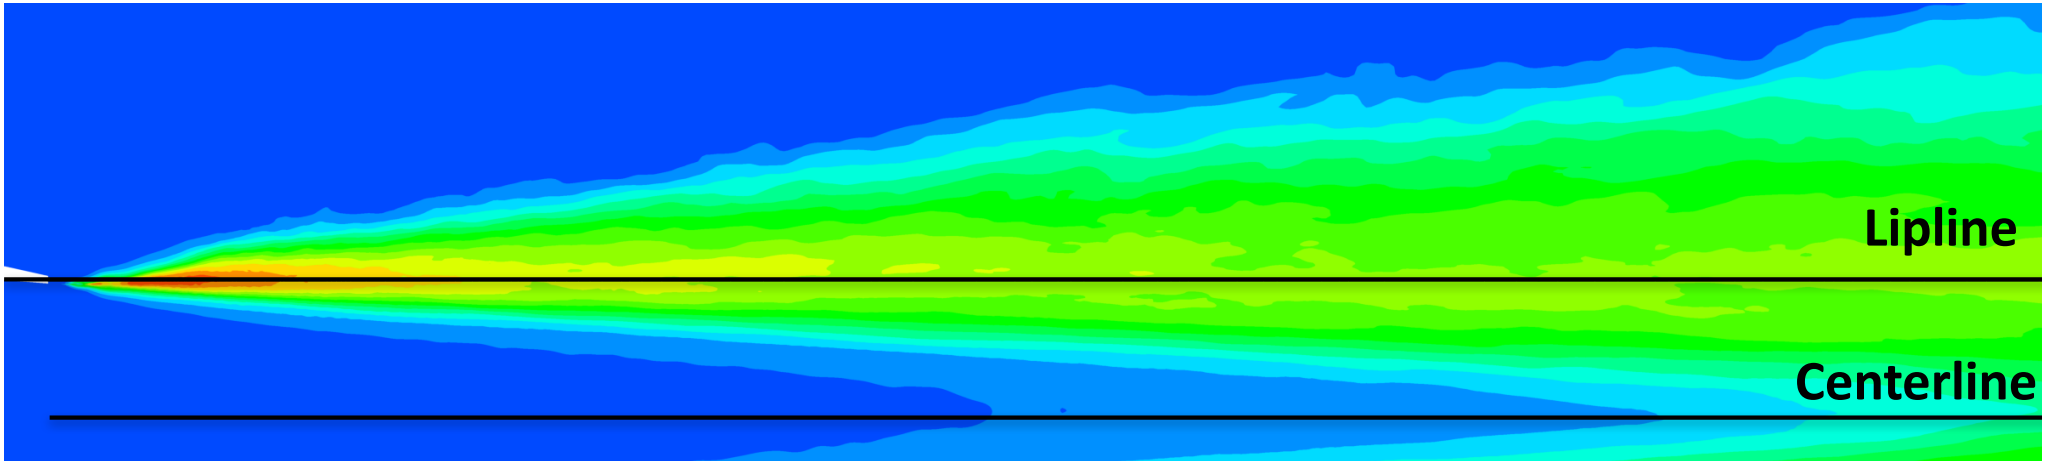


- Near field turbulent statistics computed from DDES, RANS-NLES and RANS-NLES-SEM models for comparison with PIV data from the SHJAR
- Comparison of measurements to data at lipline (z/R=1) and centerline (z/R=0)


Near-Field: Time-Averaged Centerline

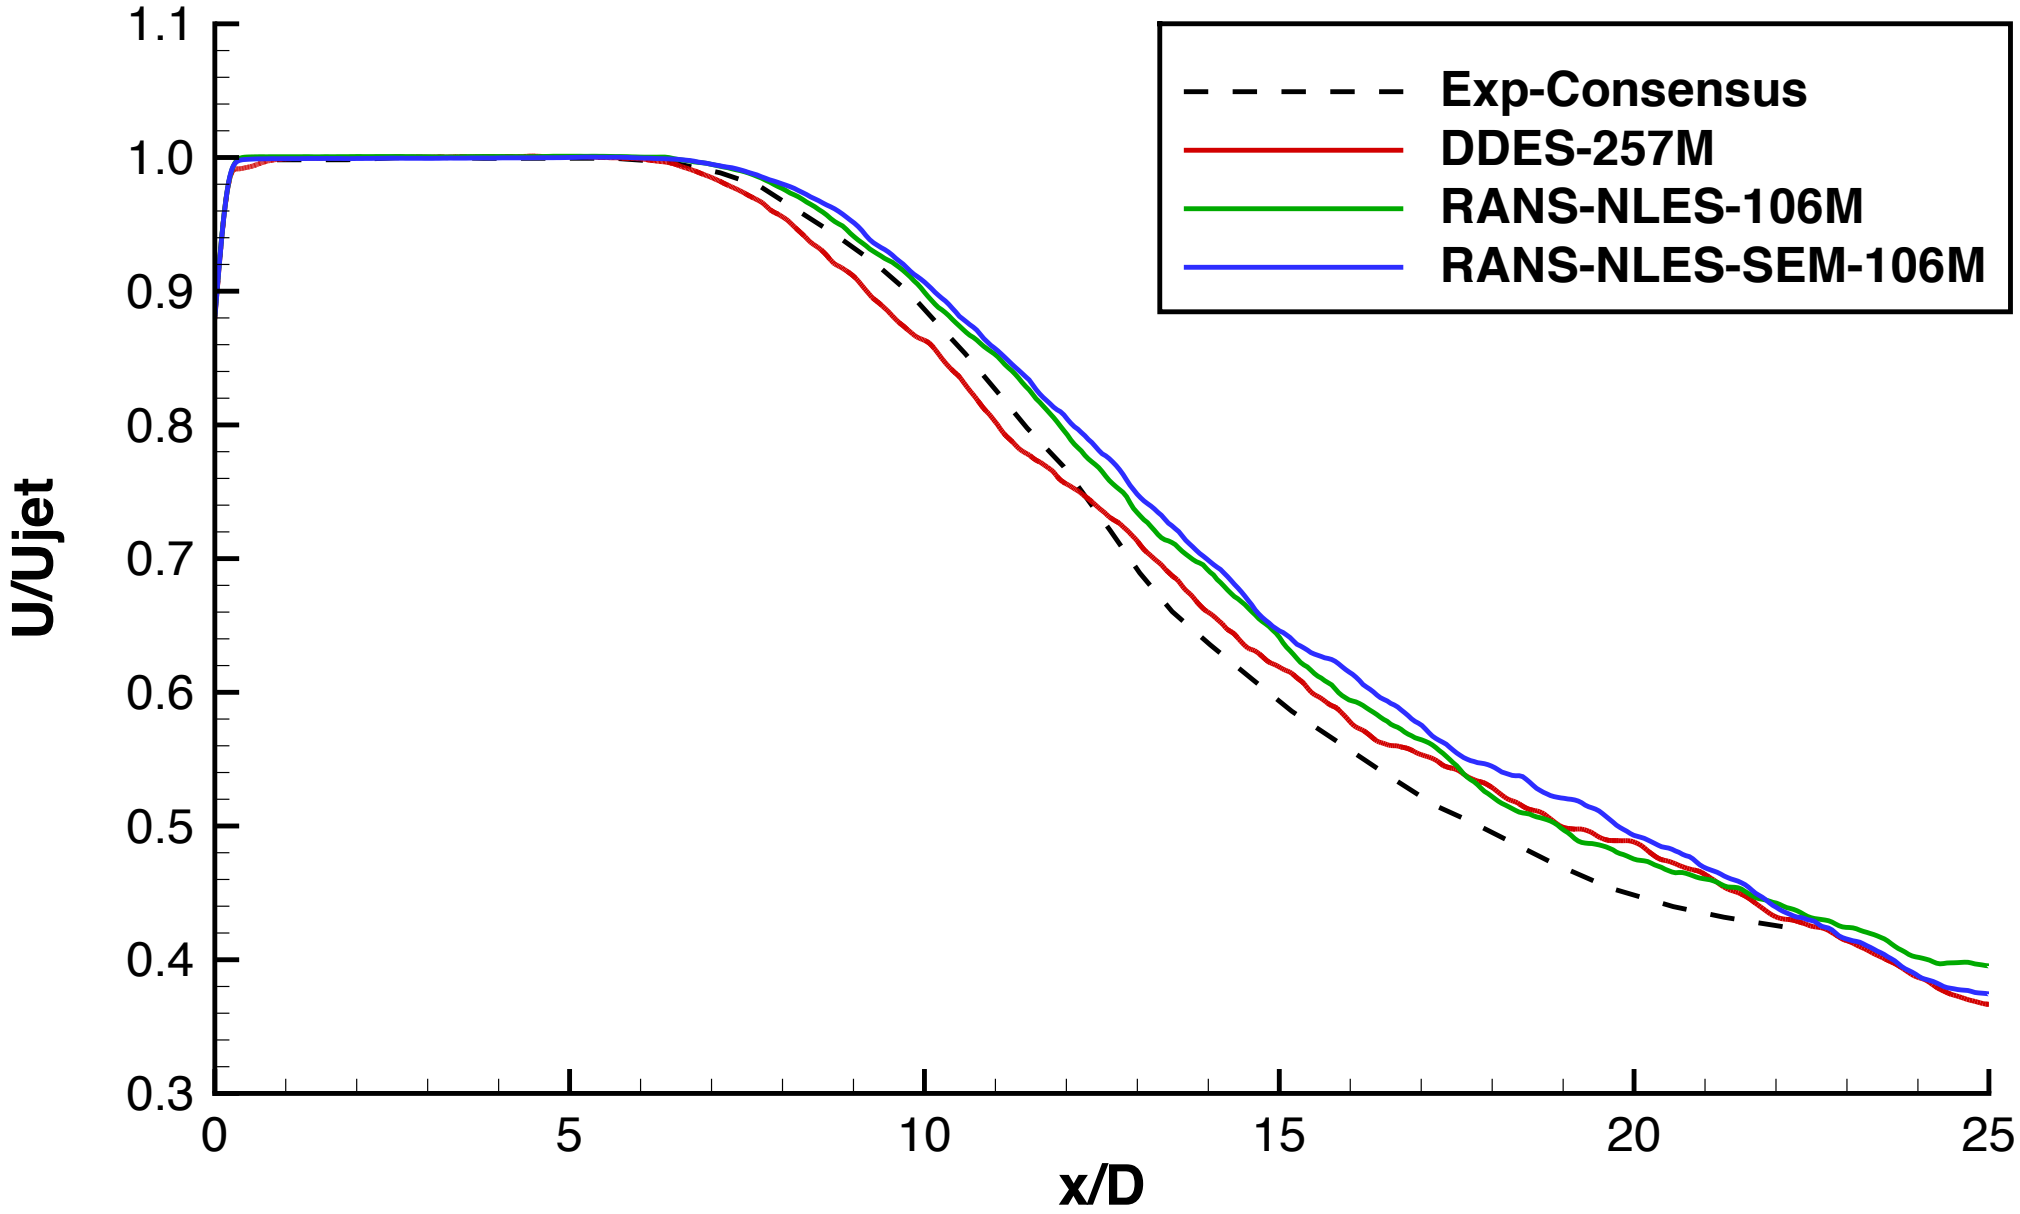


Near-Field: Time-Averaged Lipline

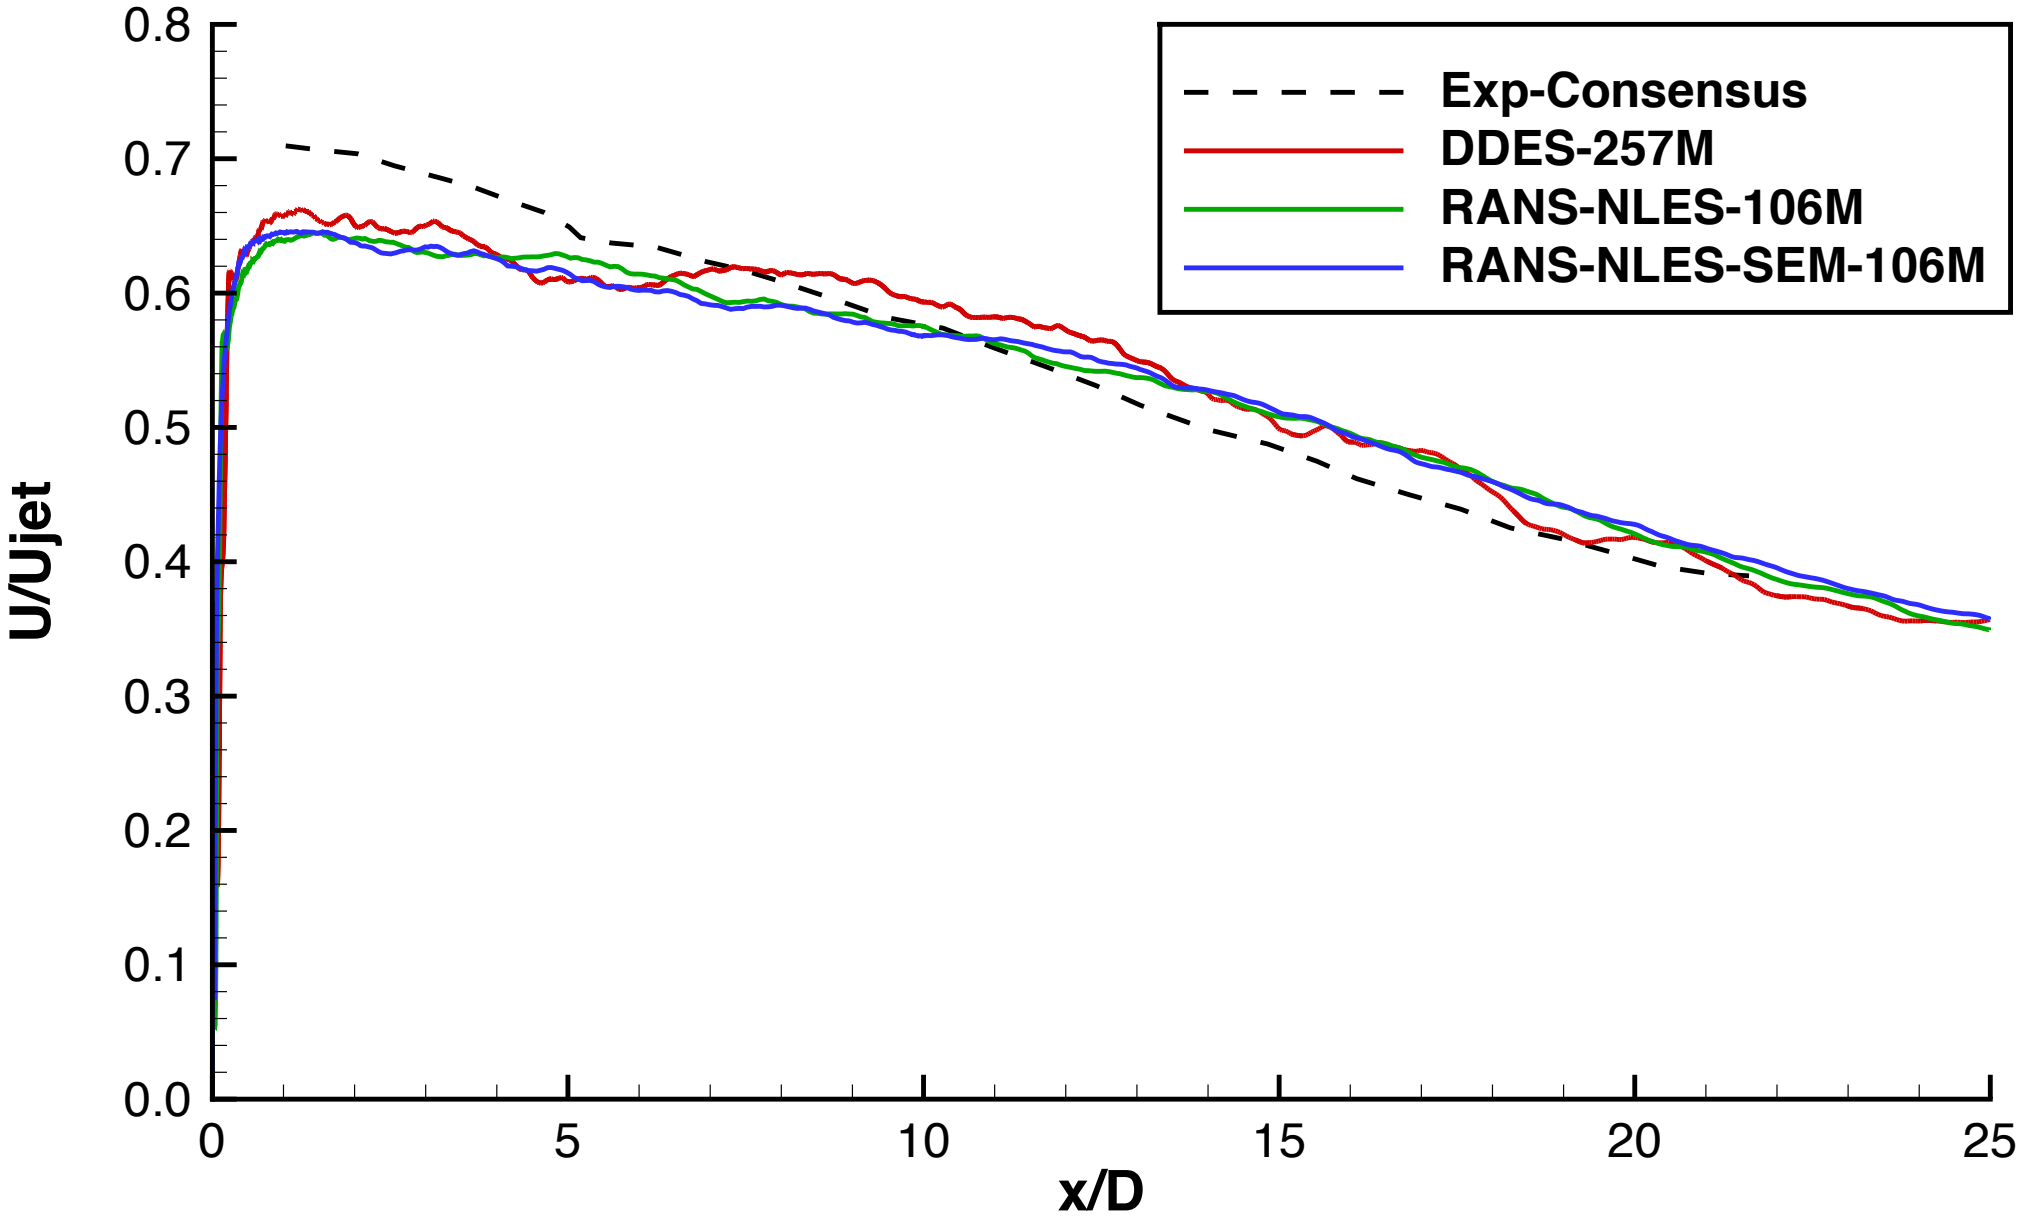

Near-Field: RMS Centerline

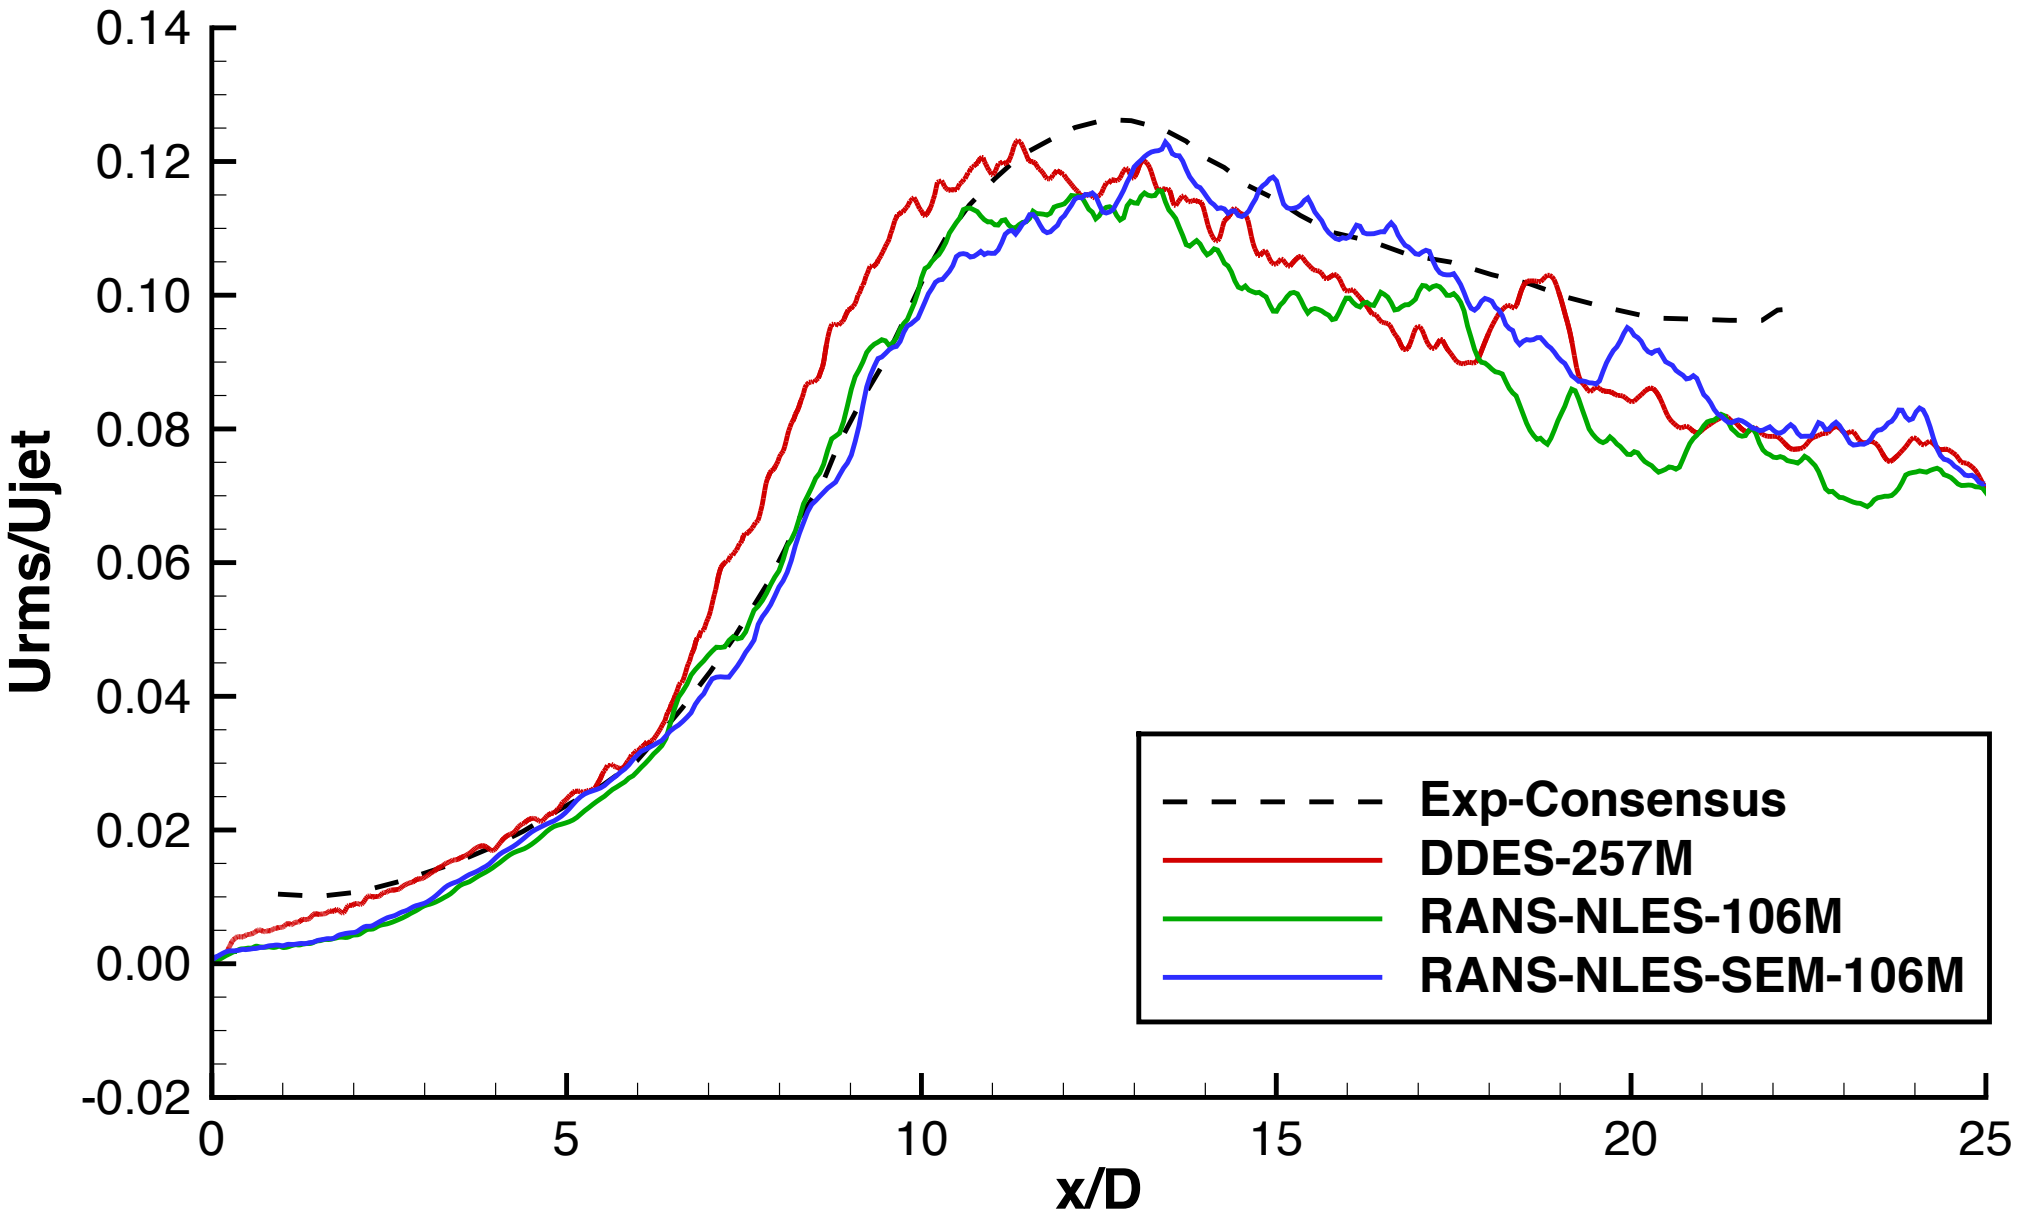


Near-Field: RMS Lipline

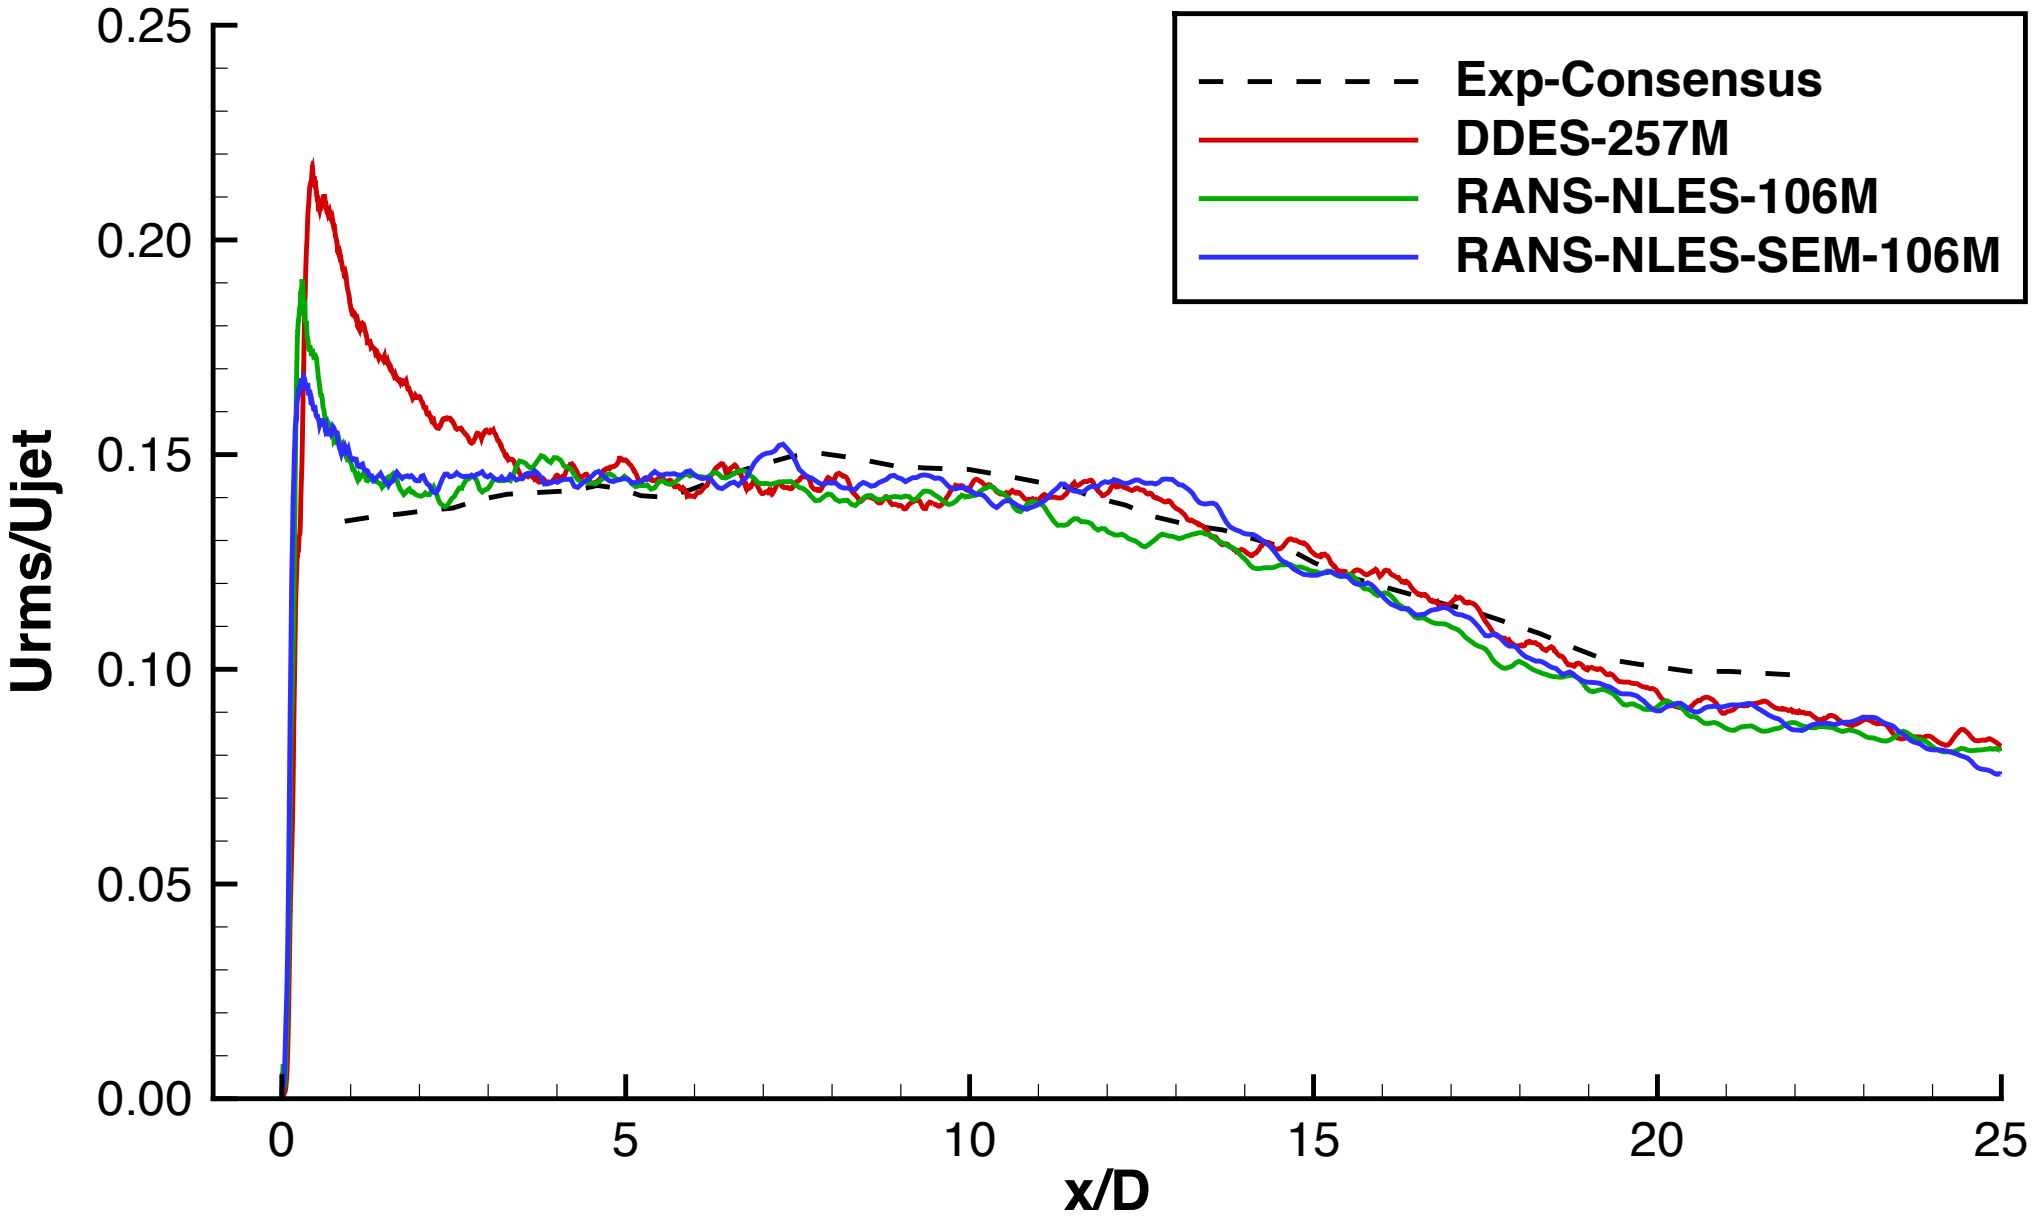

Computational Results – Far-Field

FWH Permeable Surface


- Generated surface triangulation embedded within the overset grid
- FWH surface spans the entire axial domain of the computational grid
- Edge length of the triangles set to 5 mm

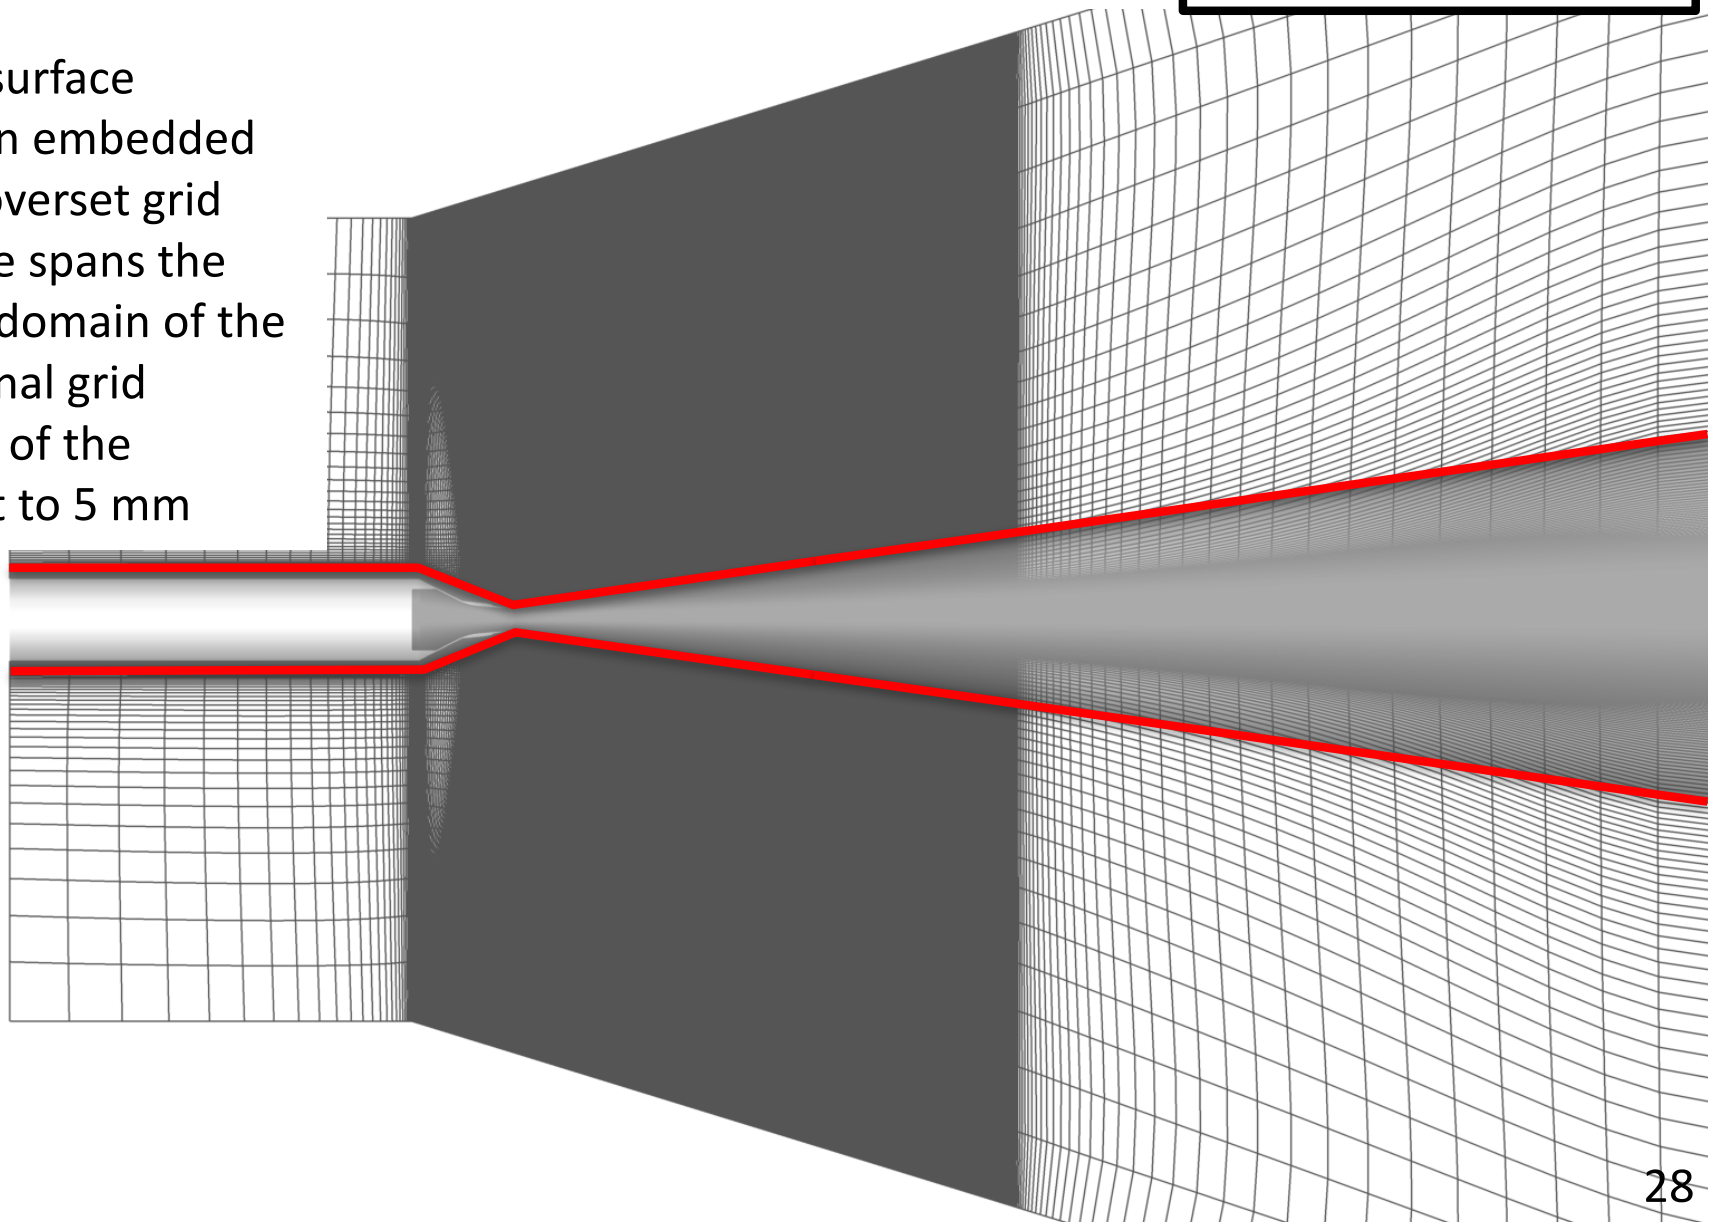

Computational Results – Far-Field

FWH Permeable Surface

- Generated surface triangulation embedded within the overset grid
- FWH surface spans the entire axial domain of the computational grid
- Edge length of the triangles set to 5 mm

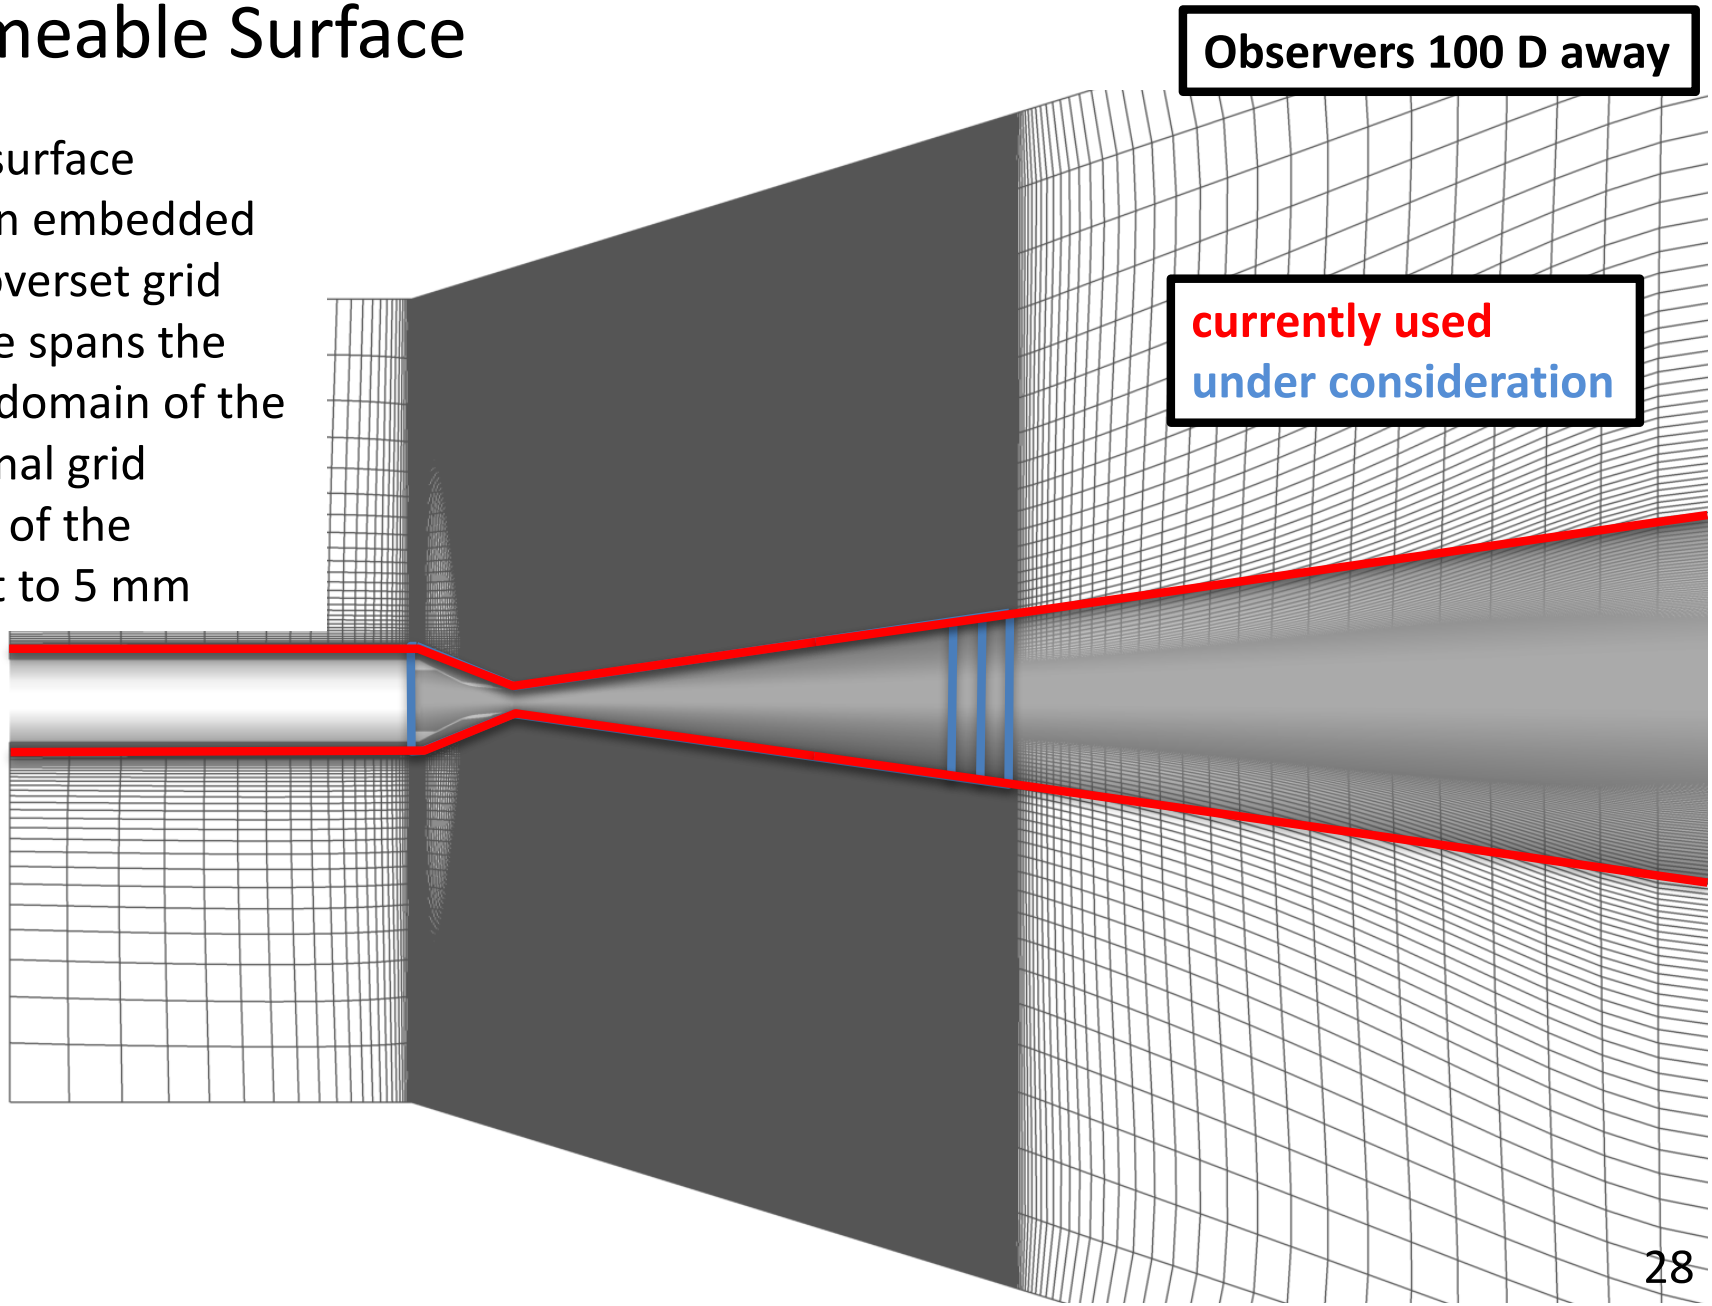



Computational Results – Far-Field





- Interpolate Volume solution to FWH surface at sampling rate of $\triangle t = 0.00001$ s (100 kHz)
- Split time sample into 5 windows (or segments) with 50% overlap at $St_{bin} = 0.02$
- Compute Integrands of FWH over each window independently
  - Q_n, F_1, F_2, F_3
  - Hanning Window is applied in the time-domain
  - FFT is applied and stored for computing far-field observer noise levels
- FWH surface integrals computed over each observer and window
  - 360 observers, uniformly distributed along the azimuth, for each angle ($60^o, 90^o, 120^o, 150^o$)
  - The PSD is ensemble averaged over the 360 observers
  - PSD is multiplied by sqrt(8/3) to recover RMS levels lost from Hanning Window
- Finally, PSD spectrum is averaged over the 5 windows for final comparison to the experimental consensus.

Computational Results – Far-Field

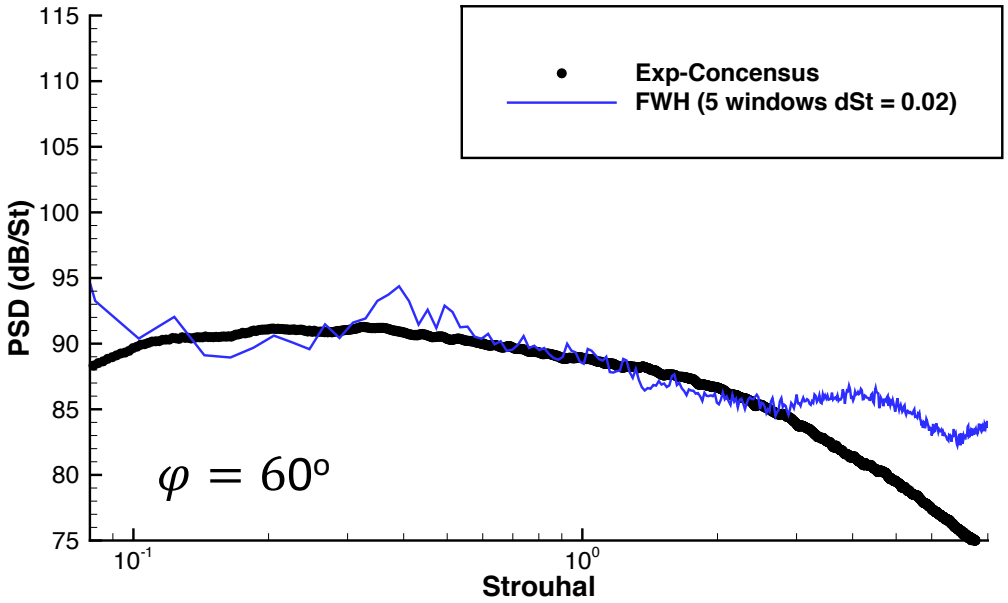

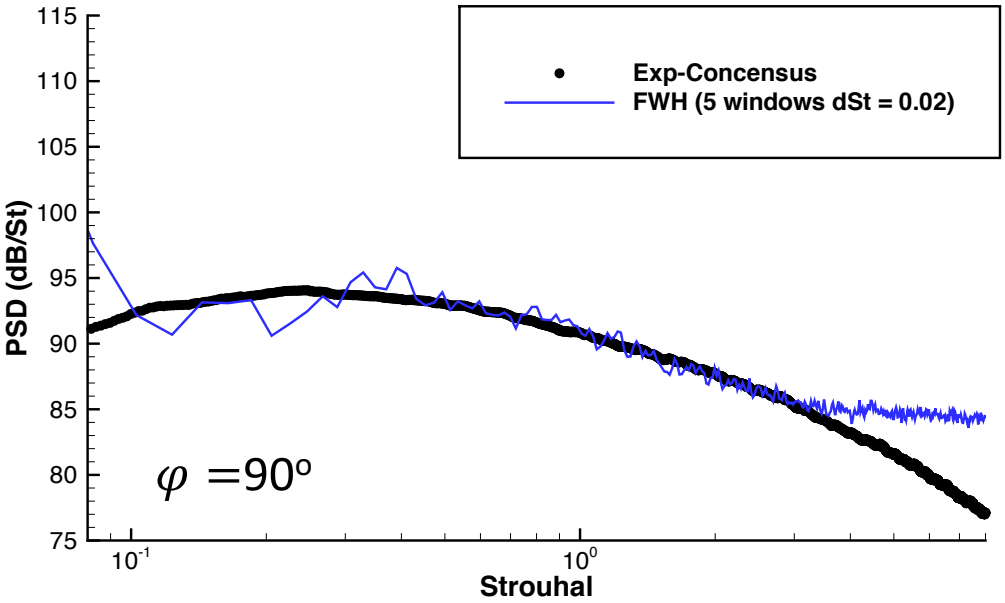

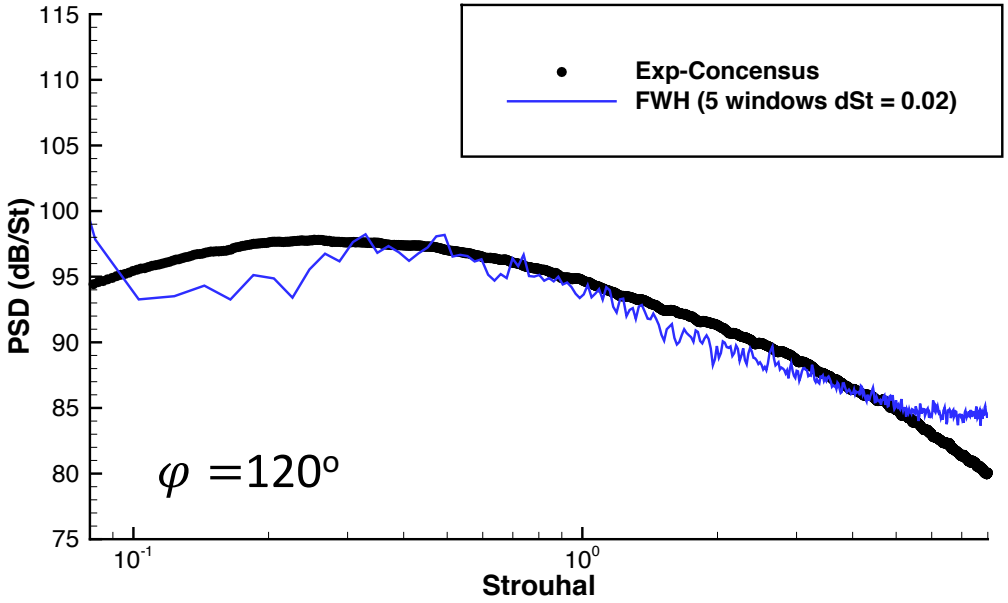


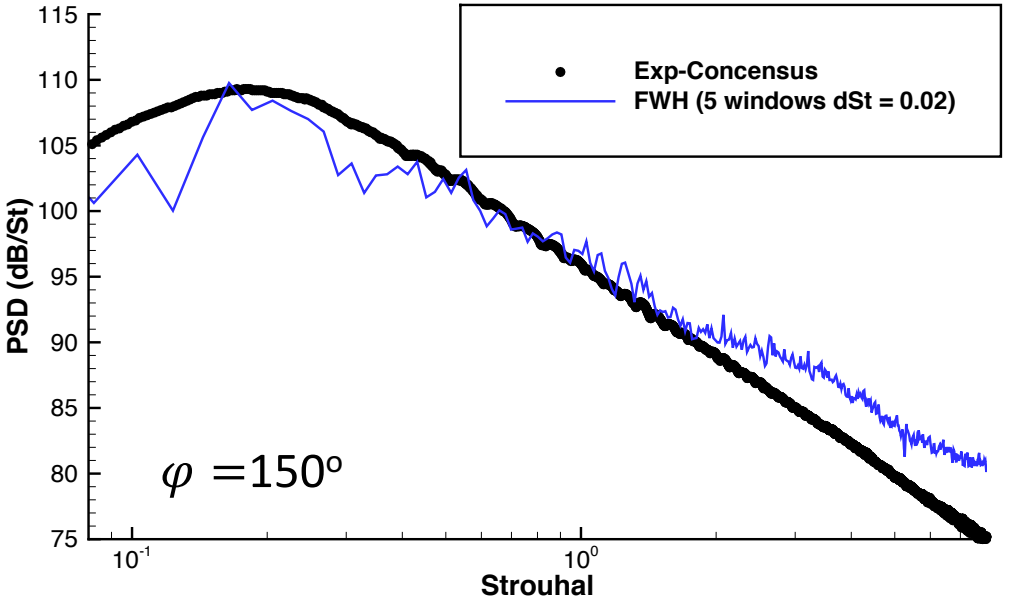

Far-Field Comparison: PSD Spectrum at 100D from exit

Computational Results – Far-Field


Far-Field Comparison: Band-Limited OASPL ($0.08 \leq St \leq 8.0$)

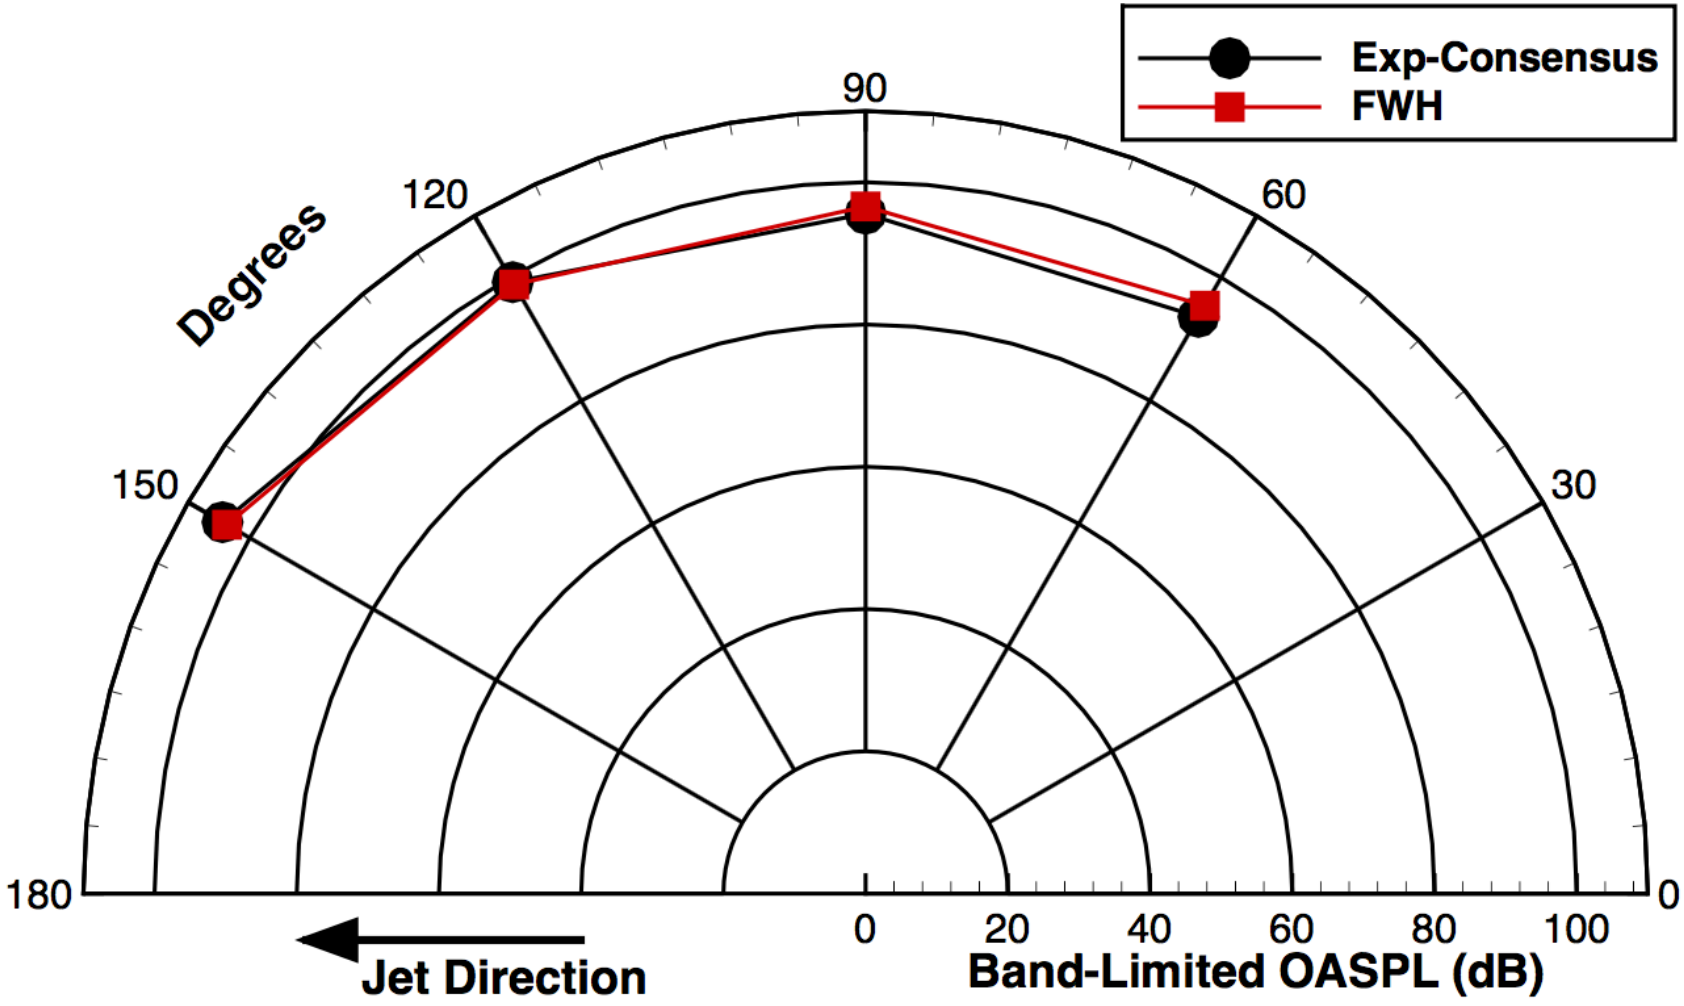



Computational Results – Far-Field


Far-Field Comparison: Band-Limited OASPL ($0.08 \leq St \leq 8.0$)

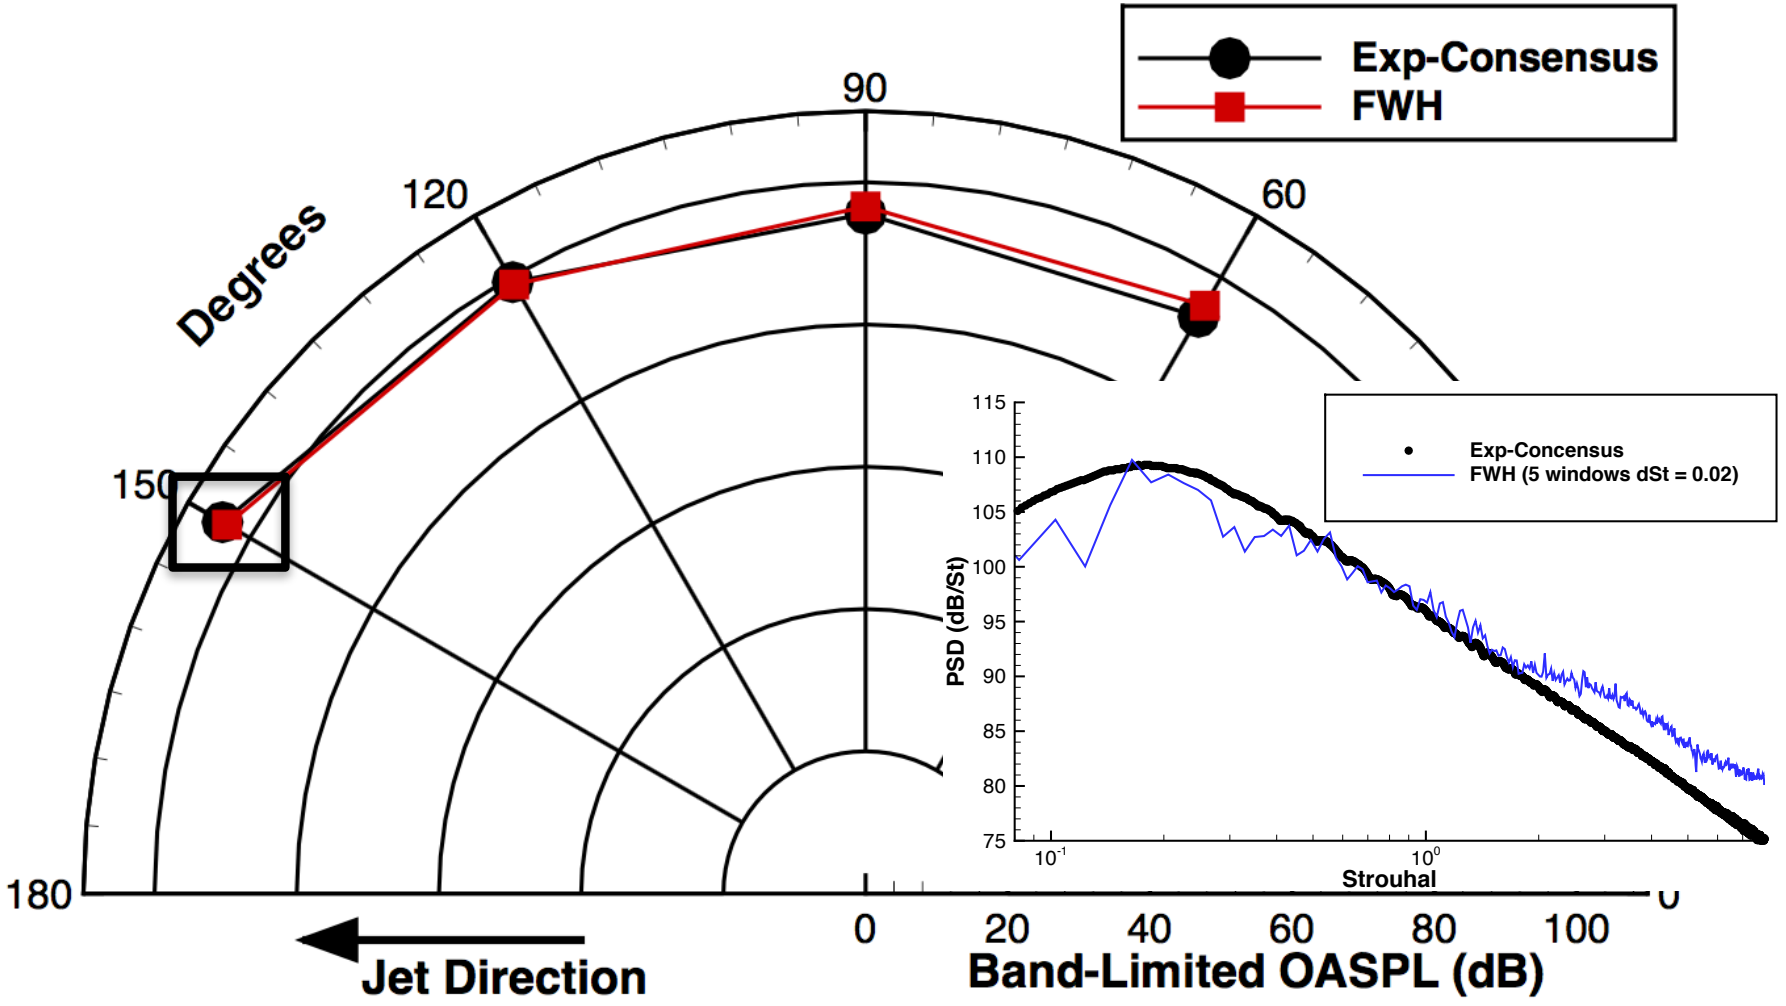



Computational Results – Far-Field


Time-Domain Pressure Associated with Peak Frequency (1100Hz) in 150°

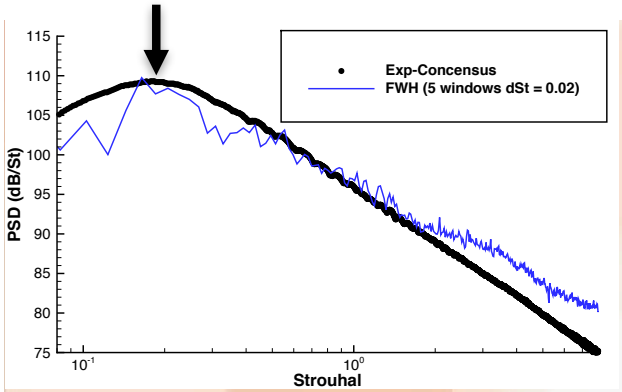

Future Work

a Posteriori Error Analysis


Axial (j-dir)

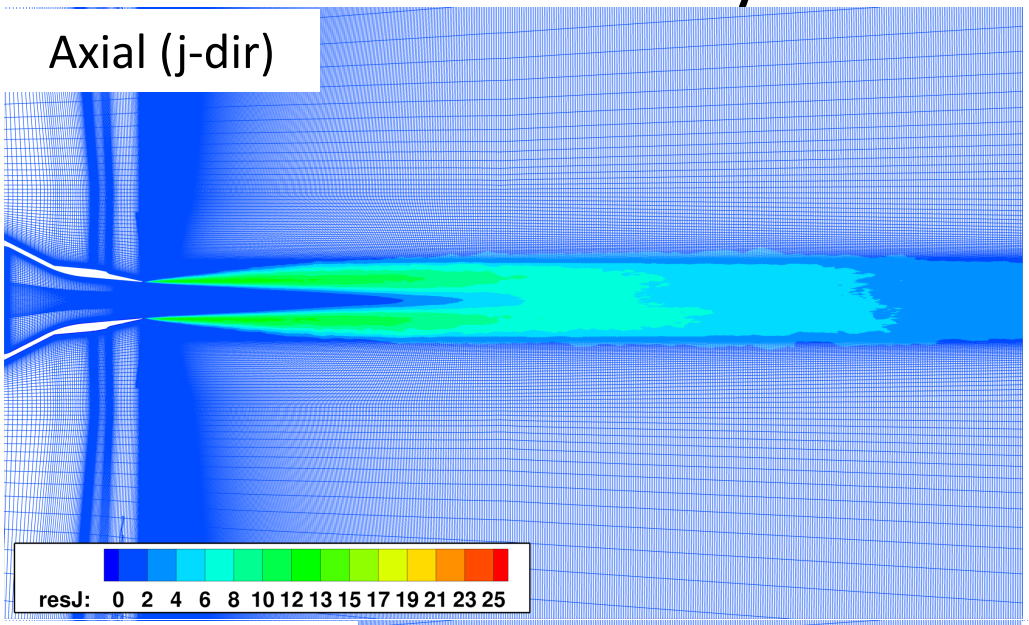


AIAA-2017-0978 Anisotropic grid-adaptation in LES of wall-bounded and free shear flows, Toosi and Larsson

- Analyze the difference in turbulent kinetic energy using the resolved velocity field with filtered version of resolved velocity field.
- Independent filtering in each direction leads to anisotropic measure for refinement

Radial (l-dir)

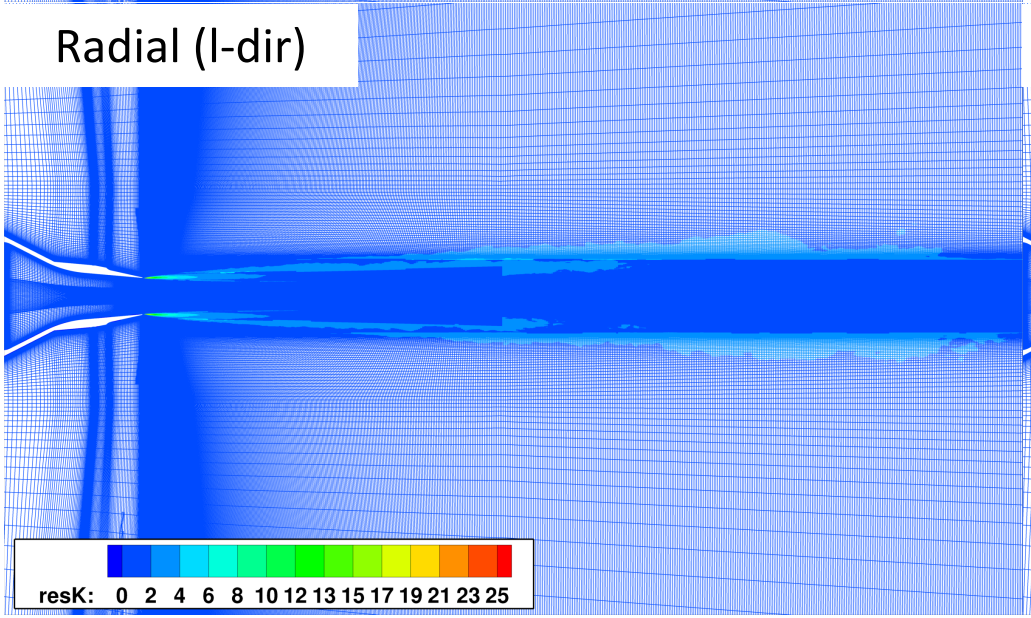


Circumferential (k-dir)

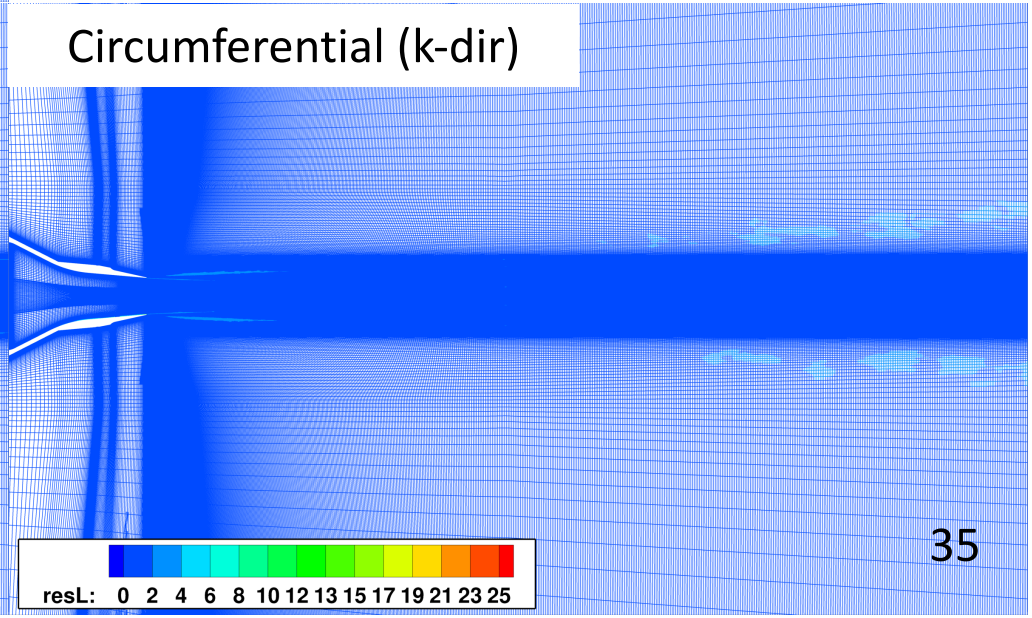


Future Work

a Posteriori Error Analysis

Axial (j-dir)

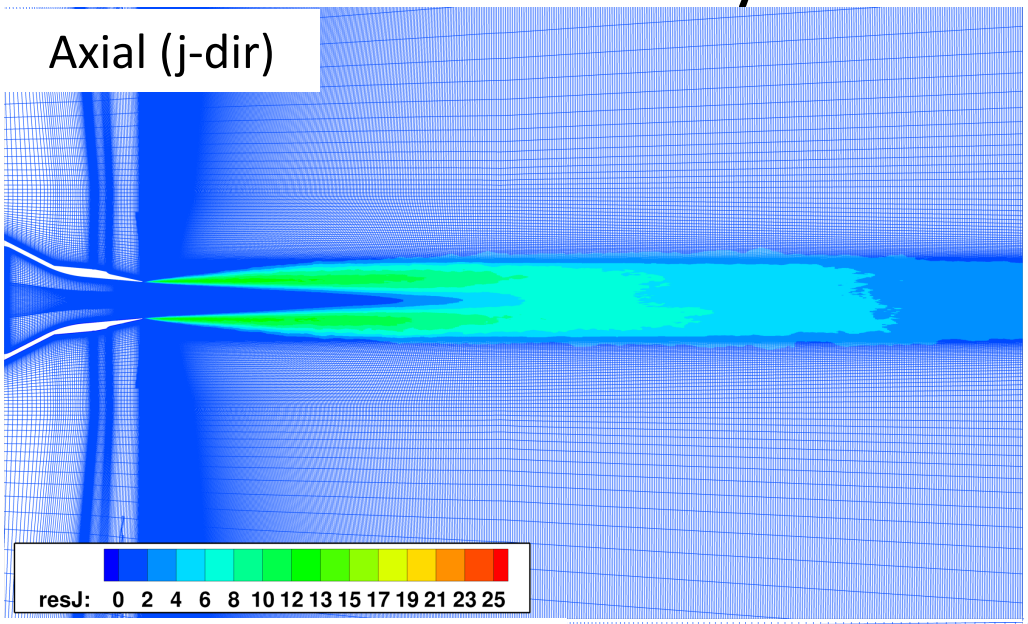


Circumferential (k-dir)

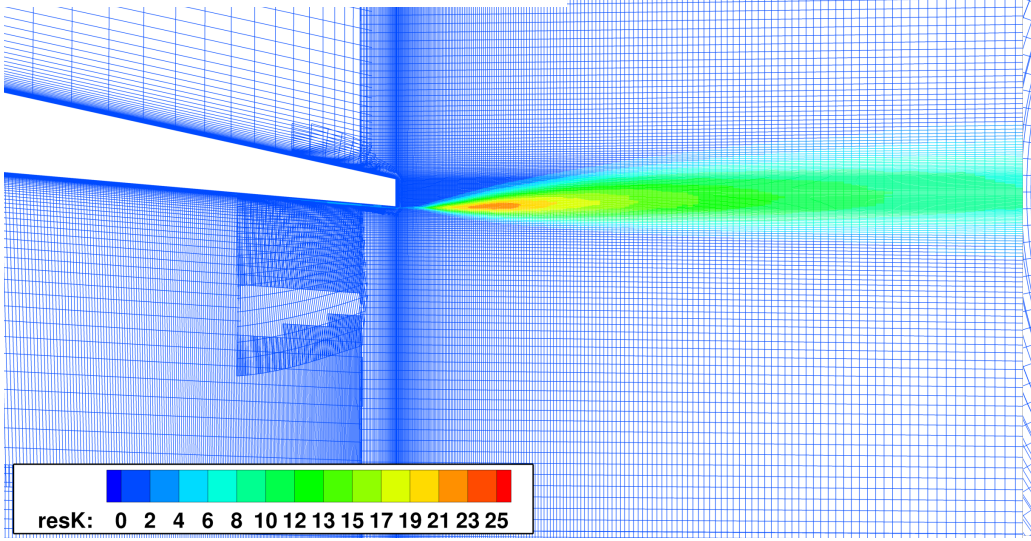

AIAA-2017-0978 Anisotropic grid-adaptation in LES of wall-bounded and free shear flows, Toosi and Larsson

- Resolution in streamwise direction is lacking the most.
- The error estimate has largest magnitude in circumferential direction.
- Radial direction pretty good.
- Improved mesh (191 M) for further investigation of SP7 and all SP3 runs

Circumferential (k-dir)

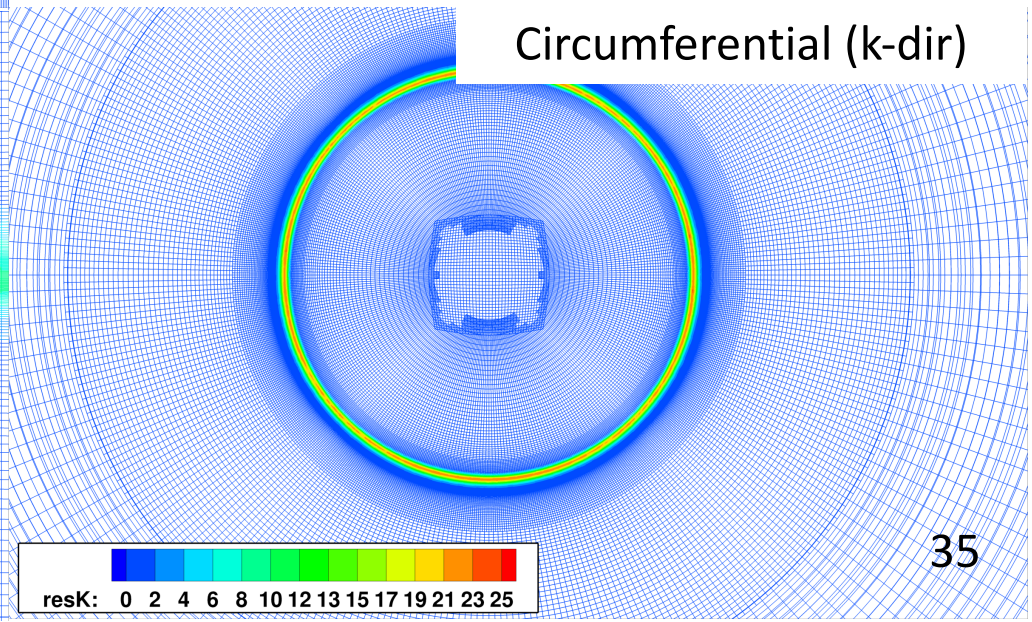


Summary

- The hybrid RANS/LES approach, within the LAVA framework, using structured curvilinear overlapping grids for the prediction of jet noise and compared our results to existing near-field PIV and far-field microphone data.
- Demonstrated improvements:
  - Hybrid RANS-NLES reduces the delay in transition to 3D turbulent structures and improved lip-line RMS prediction
  - SEM eliminates delay even further
- Completed far-field acoustic propagation
  - Mach wave radiation noise in the jet direction is well-captured
  - Sideline noise caused by turbulent fluctuations is over-predicted, likely due to elevated lip-line RMS at nozzle exit
- BL needs to be resolved better inside of nozzle for further improvements

Future Work

LES with explicit subgrid-scale (SGS) model and SEM

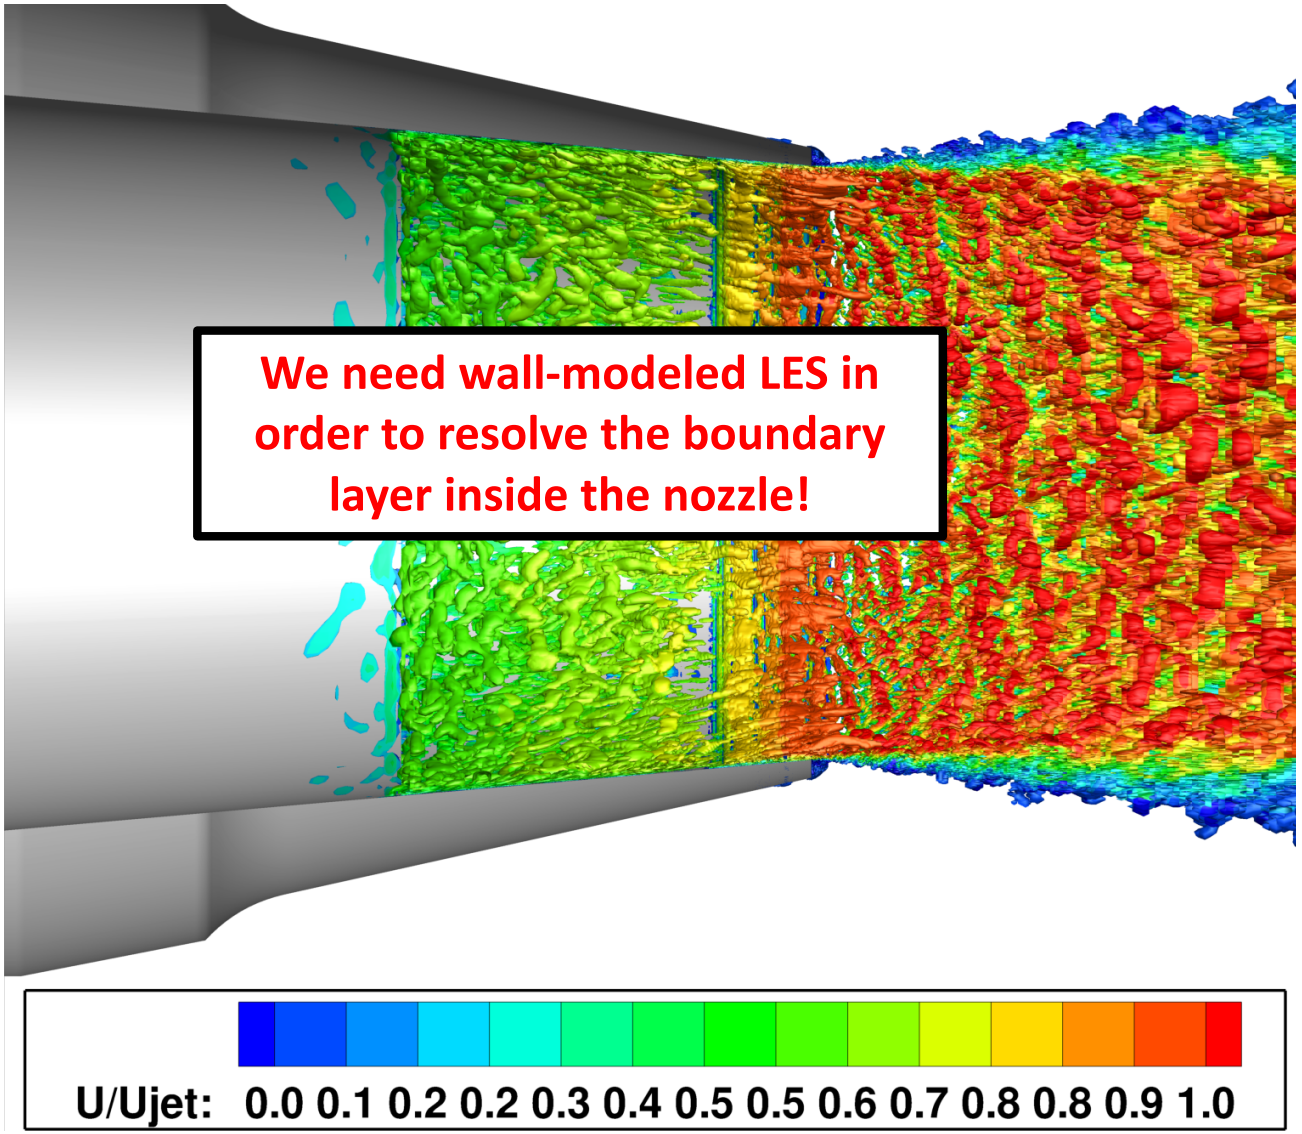

- No RANS downstream of SEM location
- Waffle cone structures inside nozzle reduced
- Artificial turbulence from SEM decays towards nozzle exit due to lack of resolution
- Recommended resolution:
  wall-resolved Δs^{+}_{circ} = 20 (12.5k points)
  wall-modeled $\Delta s_{circ} = 0.1\delta$ (2450 points)

QUESTION:

"How will SGS model affect our lipline RMS and farfield solutions"

Acknowledgements

- This work was also partially funded by the Commercial Supersonics Technology (CST) project and the Transformational Tools and Technology (T^3) project under the Aeronautics Research Mission Directorate (ARMD).
- Computer time has been provided by the NASA Advanced Supercomputing (NAS) facility at NASA Ames Research Center.
- Patrick J. Moran from NASA Ames visualization team for rendering of numerical schlieren video.
- Team members of LAVA group for helpful discussions and advise: Joseph George Kocheemoolayil, Francois Cadieux, Michael Barad

Questions?

